


CE-CC119 True D/N Box Camera






INFO:

- » 1/3" SONY 1.3 Megapixel CMOS Exmor
- » 1000 TVL Resolution
- » Back-Focus Lens Adjustment
- » S7 Digital Signal Processor (DSP)
- » OSD Menu Control via Built-in Joystick or CE-REMOTE
- » DC12V/AC24V

*Lens Sold Separately

DIMENSIONS:

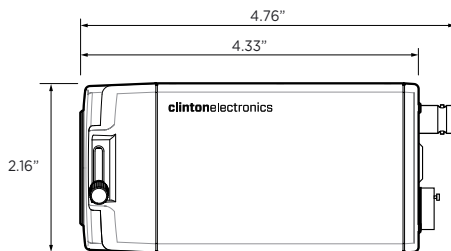

SPECIFICATIONS:

Camera	
Image Sensor	1/3" SONY 1.3 Megapixel CMOS Exmor Sensor
Resolution	1,000 TVL
Effective Pixels	1305 (H) x 1049 (V), 1.37M Pixels
Scanning System	Progressive
S/N Ratio	52dB
Sync System	Internal
Minimum Illumination	0.00001 Lux (Sens-Up x64)
Shutter Speed	1/60 - 1/60,000 sec.
Dynamic Range	N/A
Lens Mount	CS Mount or C Mount w/ adapter
Video Output	1.0 Vp-p, 75Ω
Frequency	Horizontal: 15.734 KHz, Vertical: 59.94 Hz
Power Consumption	Max. 130mA (DC12V), Max. 80mA (AC24V)
Power Requirement	DC12V / AC24V
Operating Temperature	14°F - 122°F / -28°C - 50°C
Operating Humidity	90% RH max
Weather Rating	N/A
IR LEDs	N/A
Heaters/Fan	N/A
Materials	Aluminum
Dimensions (w/ out Lens)	2.71" (W) x 2.16" (H) x 4.33" (D) 69mm (W) x 55mm (H) x 110mm (D)
Weight (w/ out Lens)	.75 lbs / 340.19g

OSD	
DSP Type	S7
Menu Control	OSD Menu Control via Built-In Joystick or CE-REMOTE
Exposure	Brightness, Shutter, AGC
Sens-Up	Yes (x2 - x64)
White Balance	ATW, AWB, AWC-Set, Manual
Digital Dynamic Range	Yes
Backlight Control	BLC, HLC, WDR
Day/Night	Auto, Color, B&W, External
Noise Reduction	3DNR
Camera Title/ID	N/A
Sync	N/A
Monitor	View Angle (4:3 / 16:9)
Motion Detection	(Intelligent) 4 Zones
Privacy Masking	15 Zones
Digital Image Stabilization	N/A
Dead Pixel Control	N/A
Digital Effects	Digital Zoom, D-WDR, Defog, Image Flip
Languages	English, Chinese, Japanese, Korean
Other	Sharpness, Gamma, Pedestal, Color Gain

ACCESSORIES	
CE-H13	Outdoor Box Camera Housing (IP66 Weather Rated)
CE-H02	Soffit Mount Bracket for H13 Housing
CE-B15	Box Camera Bracket
CE-203X	Box Camera Bracket
CE-B07	Box Camera Bracket

CERTIFICATIONS:

