


Indoor High Performance Cameras for Home and Business

CMD4350/4350B, CMD4363/4363B, CMD4365/4365B Plastic Dome

Features

- 540/600/650 TVL
- 1/3" CCD
- 21 IR LEDs
- 2.8~ 12mm varifocal lens
- Built-In 3-Axis Bracket
- DC 12V
- Indoor, Plastic Case

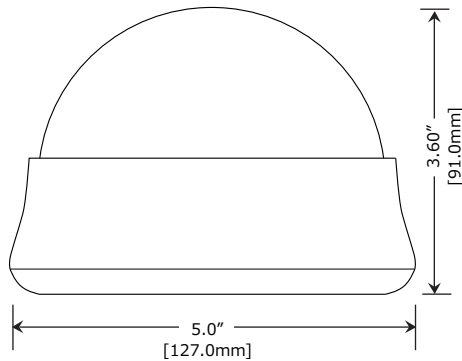

Specifications

Model		CMD4350/CMD4350B	CMD4363/CMD4363B	smart IR	CMD4365/CMD4365B
Image	Image Sensor	SONY 1/3" Super HAD II CCD	PixelPlus 1/3" CCD		760H Color CCD
	Effective Pixels	NTSC: 510 (H) X 492 (V)	NTSC:		NTSC:
	Horizontal Resolution	540 TVL	600 TVL		650 TVL
Lens	Focal Length	2.8 ~ 12mm varifocal lens	2.8 ~ 12mm varifocal lens		2.8 ~ 12mm varifocal lens
	Iris	AES	-		-
	Focus	Manual	-		-
	Zoom	Manual	-		-
	Video System	NTSC	NTSC		NTSC
	Video Scanning Type	2:1 Interlace	2:1 Interlace		2:1 Interlace
	Sync. System	Internal	Internal		Internal
Electrical	S/N Ratio	> 50dB(AGC off)	> 50dB(AGC off)		> 50dB(AGC off)
	Min. Illumination	0.1 Lux	0.1 Lux		0.1 Lux
	Video Output	1 BNC, 1.0 Vp-p, 75 Ohm Comp.	1 BNC, 1.0 Vp-p, 75 Ohm Comp.		1 BNC, 1.0 Vp-p, 75 Ohm Comp.
	Electronic Shutter	1/60 ~ 1/100,000 sec	1/60 ~ 1/100,000 sec		1/60 ~ 1/100,000 sec
	Wide Dynamic Range	Digital WDR (ATR)	-		-
Function	ATR	Horizontal/Vertical Flip, ON/OFF	-		-
	OSD	-	-		-
	White Balance	Yes (ATW / Manual / AWC/PUSH)	-		-
	Back Light Compensation	OFF/ON (48 zones compensation)	-		-
	Gain Control	Auto	-		-
	DNR	2D DNR	-		-
	Infrared Red Lamps	21 pcs IR LED @850nm	21 pcs IR LED		21 pcs IR LED
Infrared LED	Effective IR Distance	66ft	66ft		66ft
	Input Voltage	DC 12V +/- 10%, Auto polarity	DC 12V +/- 10%, Auto polarity		DC 12V +/- 10%, Auto polarity
Power	Power Consumption	Max. 300mA	Max. 300mA		Max. 300mA
	Weather Protection	N/A	-		-
Environment	Vandal Protection	N/A	-		-
	Operating Temperature	14°F ~ 113 °F	14°F ~ 113 °F		14°F ~ 113 °F
	Storage Temperature	-22°F ~ 140 °F	-22°F ~ 140 °F		-22°F ~ 140 °F
	Chassis Material & Color	Plastic & White (CMD4350) Black (CMD4350B)	Plastic & White (CMD4363) Black (CMD4363B)		Plastic & White (CMD4365) Black (CMD4365B)
Mechanical	Product Net Weight	.79lbs	.79lbs		.79lbs
	Product Dimension	127mm x 91mm	127mm x 91mm		127mm x 91mm