




## HD-TVI Motorized Dome Camera CMHD3423D-Z



### Key Features:

- 2.1MP High Definition
- 1920x1080P@30fps
- 2.8-12mm Varifocal Lens
- 131ft(40m) IR distance
- OSD Menu via UTC technology with Platinum TVI DVR
- IP66 weatherproof

### Dimensions:

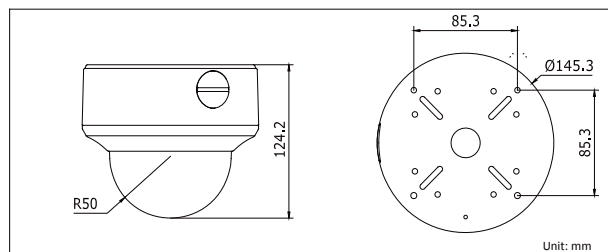

# HD-TVI Motorized Dome Camera

## CMHD3423D-Z

CAMERA	
Image Sensor	1/2.7" CMOS
Signal System	NTSC/PAL
Effective Pixels	1930(H)*1088(V)
Min. Illumination	0.01 Lux, 0 Lux with IR
Shutter Speed	1/30(1/25) s to 1/50,000 s
Lens	Motorized Lens: 2.8-12mm Angle of View: 105.2° -32.8°
Day & Night	ICR
Synchronization	Internal
Video Frame Rate	1080p@30fps/1080p@25fps
HD Video Output	1 Analog HD Output
S/N Ratio	More than 52dB
MENU	
Camera ID	On/off (0-255)
AGC	Support
D/N Mode	Color/ BW/ Auto/ EXT
White Balance	Auto/ User/ Push/ 8000K/ 6000K/ 4200K/ 3200K/HOLD
Privacy Mask	On/ Off, maximum 2 zones
Motion Detection	On/ Off
BLC	Support
Anti-flicker	On/off
Language	English/ Chinese
Function	Mirror
GENERAL	
Working Temperature /Humidity	-40 ° F - 140 ° F (-40 ° C - 60 ° C) Humidity 90% or less (non-condensing)
Power Supply	DC 12V, AC 24V
Power Consumption	Max. 5W
Weather Proof Ratings	IP66
IR Range	Up to 131ft(40m)
Dimension	5.7" × 4.9" (145.3×124.2mm)
Weight	2.0lb(880g)