

CMHD3433-A


HD720P HD-TVI Vandal Proof Dome Camera



Key features

- HD720P Video Output
- Adopt HDTV Technology
- True Day/Night
- DNR, Smart IR
- 131ft(40m) IR distance
- Vandal Proof
- 3-axis

Dimensions

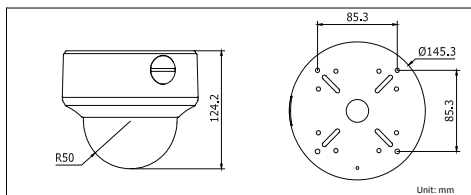

CMHD3433-A	
Camera	
Image Sensor	1/3" Sensor
Signal System	NTSC/PAL(Euro Version)
Effective Pixels	1305(H)*1049(V)
Min. Illumination	0.001 Lux @(F1.2,AGC ON), 0 Lux with IR
Shutter Time	NTSC: 1/60 s(PAL: 1/50 s) to 1/50,000 s
Lens	2.8-12mm Angle of View: 80° -28°
Day & Night	ICR
Synchronization	Internal synchronization
Video Frame Rate	NTSC: 720p@30fps/PAL: 720p@25fps
Video Output	1 Analog HD output,1 Analog BNC output
S/N Ratio	More than 52dB
General	
Working Temperature /Humidity	-22 ° F - 140 ° F (-30 ° C - 60 ° C) Humidity 90% or less (non-condensing)
Power Supply	12V DC
Power Consumption	Max. 3.5W
Weather Proof Ratings	IP66
IR Range	Up to 131ft(40m)
Dimensions	φ5.7" x 4.9" (φ145.3×124.2mm)
Weight	2.0lb(880g)