


# CMHD7422


## HD1080P HD-TVI IR Dome Camera

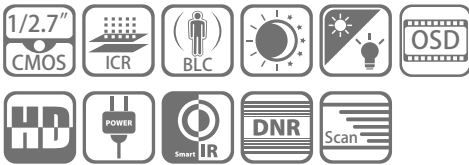

### Key features

- HD1080P Video Output
- Adopt HDTV Technology
- True Day/Night, Smart IR
- Up to 65ft(20m) IR distance
- Vandal proof
- OSD menu via UTC technology with Platinum TVI DVR

### Dimensions

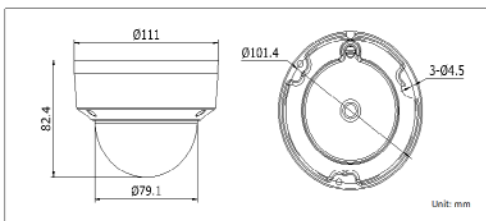

CMHD7422	
<b>Camera</b>	
Image Sensor	1 / 2.7" Sensor
Signal System	NTSC/PAL(Euro Version)
Effective Pixels	1930(H)*1088(V)
Min. Illumination	0.1 Lux, 0 Lux with IR
Shutter speed	1/30(1/25) s to 1/50,000 s
Lens	3.6mm Angle of View: 90°
Day & Night	ICR
Synchronization	Internal synchronization
Video Frame Rate	1080p@30ps/1080p@25fps
HD Video Output	1 Analog HD output
S / N Ratio	More than 52dB
<b>Menu</b>	
Camera ID	On/off (0-255)
AGC	Support
D/N Mode	Color/ BW/ Auto/ EXT
White Balance	Auto/ User/ Push/ 8000K/ 6000K/ 4200K/ 3200K/HOLD
Privacy Mask	On/ Off, maximum 2 zones
Motion Detection	On/ Off
BLC	Support
Anti-flicker	On/off
Language	English/ Chinese
Function	Mirror
<b>General</b>	
Working Temperature / Humidity	-40 ° F - 140 ° F (-40 ° C - 60 ° C) Humidity 90% or less (non-condensing)
Power Supply	12V DC
Power Consumption	Max. 3W
IR Range	Up to 65ft(20m)
Dimensions	φ111 × 82.4 mm (φ4.37" × 3.24" )
Weight	1.2lb(550g)