


CMHR9923DW


HD1080P HD-TVI Outdoor Vari-focal Bullet Camera

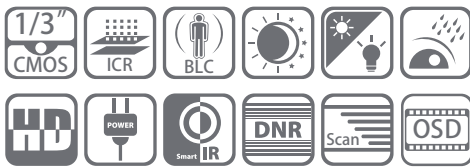

Key features

- HD1080P Video Output
- Adopt HDTV Technology
- True Day/Night
- 2.8 - 12mm vari-focal lens
- WDR, 3D DNR, Smart IR
- Up to 165ft(50m) IR distance
- OSD Menu via UTC technology with Platinum TVI DVR

Dimensions

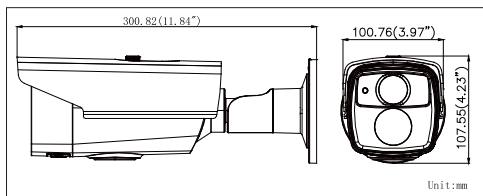

| CMHR9923DW | |
|----------------------------------|---|
| Camera | |
| Image Sensor | 1 / 3" Sensor |
| Signal System | NTSC / PAL(Euro Version) |
| Effective Pixels | 1920(H)*1080(V) |
| Min. Illumination | 0.014 Lux @ (AGC ON),0 Lux with IR |
| Shutter speed | NTSC: 1/30 s(PAL: 1/25 s)to 1/50,000 s |
| Lens | 2.8-12mm Angle of view: 92° - 32° |
| Day & Night | ICR |
| Synchronization | Internal synchronization |
| Video Frame Rate | NTSC:1080p@30fps/PAL:1080p@25fps |
| HD Video Output | 1 Analog HD output |
| S / N Ratio | More than 52dB |
| Menu | |
| Scene | Indoor, Outdoor, Indoor1, LOW-LIGHT |
| Camera ID | On/off (15 characters, position programmable) |
| AGC | Support |
| D/N Mode | Color/BW/EXT |
| White Balance | ATW, AWC-SET, Indoor, Outdoor, Manual |
| Privacy Mask | On/Off, maximum 8 zones |
| Motion Detection | On/Off, maximum 4 zones |
| BLC | Support |
| Anti-flicker | On/off |
| Language | English, Japanese, CHN1, CHN2, Korean, German, French, Italian, Spanish, Polish, Russian, Portuguese, Dutch, Turkish, Hebrew and Arabic |
| Function | Eclipse, Digital noise reduction, Digital zoom(62x), Slow shutter, Mirror, Defog, Defect pixel correction, SMART D-ZOOM |
| General | |
| Working Temperature / Humidity | -4 ° F - 140 ° F (-20 ° C - 60 ° C) Humidity 90% or less (non-condensing) |
| Power Supply | 12V DC, 24V AC |
| Power Consumption | Max. 10W |
| Weather Proof Ratings | IP66 |
| IR Range | Up to 165ft(50m) |
| Dimensions(without junction box) | 11.8" × 4.0" × 4.2" (300.8×100.8×107.6mm) |
| Weight(without junction box) | 1.5lb(700g) |