


# CMHT1432-28


## HD720P HD-TVI Turret Camera

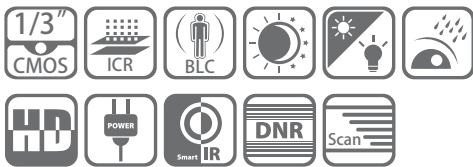

### Key features

- HD720P Video Output
- Adopt HDTVI Technology
- True Day/Night
- DNR, Smart IR
- 65ft(20m) IR distance
- IP66 weatherproof

### Dimensions

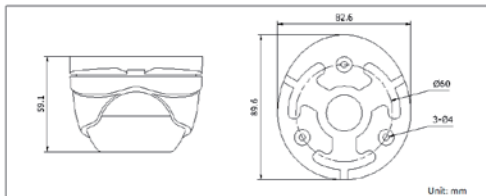

CMHT1432-28	
<b>Camera</b>	
Image Sensor	1/3" Sensor
Signal System	NTSC/PAL(Euro Version)
Effective Pixels	1280(H)*720(V)
Min. Illumination	0.01 Lux @(AGC ON), 0 Lux with IR
Shutter Time	NTSC: 1/30 s(PAL:1/25 s) to 1/50,000 s
Lens	2.8mm
	Angle of view: 99.73°
Day & Night	ICR
Synchronization	Internal synchronization
Video Frame Rate	NTSC: 720p@30fps/PAL: 720p@25fps
HD Video Output	1 Analog HD output
S/N Ratio	More than 52dB
<b>General</b>	
Working Temperature /Humidity	-40 ° F - 140 ° F (-40 ° C - 60 ° C) Humidity 90% or less (non-condensing)
Power Supply	12V DC
Power Consumption	Max. 3.5W
Weather Proof Ratings	IP66
IR Range	Up to 65ft(20m)
Dimensions	3.5" × 2.3" (89.6 × 59.1 mm)
Weight	0.9lb(400g)