


# CMHT2732-28


## HD720P HD-TVI Low Light Turret Camera

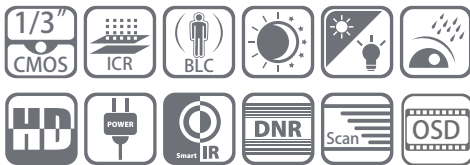

### Key features

- HD720P Video Output
- Adopt HDTV Technology
- True Day/Night
- 3D DNR, Smart IR
- 131ft(40m) IR distance
- IP66 weatherproof
- Low illumination
- OSD Menu via UTC technology with Platinum TVI DVR

### Dimensions

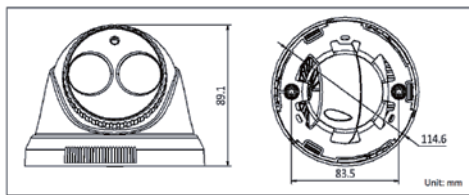

CMHT2732-28	
<b>Camera</b>	
Image Sensor	1 / 3" Sensor
Signal System	NTSC/PAL(Euro Version)
Effective Pixels	1305(H)*1049(V)
Min. Illumination	0.001 Lux @(F1.2,AGC ON), 0 Lux with IR
Shutter speed	NTSC: 1 / 60 s to 1 / 50,000 s PAL: 1 / 50 s to 1 / 50,000 s
	2.8mm
Lens	Angle of View: 92.45°
Day & Night	ICR
Synchronization	Internal synchronization
Video Frame Rate	NTSC: 720p@60fps / PAL: 720p@50fps
HD Video Output	1 Analog HD output
S / N Ratio	More than 62dB
<b>Menu</b>	
Automatic Exposure	Globe AE / DWDR
AGC	Low / Middle / High / Off
Slow Shutter	Support
White Balance	Auto / Manual
D / N Mode	Color / BW / SMART IR
3D DNR	Low / Middle / High / Off
Motion Detection	Support, maximum 4 zones
Privacy Mask	On / Off, maximum 8 zones
UTC Function	Support
Language	English / Chinese
Function	Digital Wide Dynamic Range, 3D Digital Noise Reduction, Sharpness, Brightness, Digital Zoom, Mirror
<b>General</b>	
Working Temperature / Humidity	-4 ° F - 140 ° F (-20 ° C - 60 ° C) Humidity 90% or less (non-condensing)
Power Supply	12V DC
Power Consumption	Max. 4.5W
Weather Proof Ratings	IP66
IR Range	Up to 131ft(40m)
Dimensions	φ4.5" × 3.5" (φ114.6 × 89.1mm)
Weight	0.7lb(300g)