


# CMIP1122 / CMIP1122-28


## 2.0 MP Matrix IR Turret Network Camera

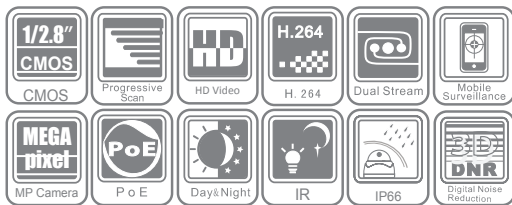

### Key features

- 2.0 megapixel high resolution
- HD real-time video
- Day / night auto switch
- IP66 ingress protection
- Matrix IR illuminator (about 65-100ft/20-30m)
- 3D DNR & DWDR
- Video Content Analytics(VCA)
- Region of Interest(ROI)

### Dimensions

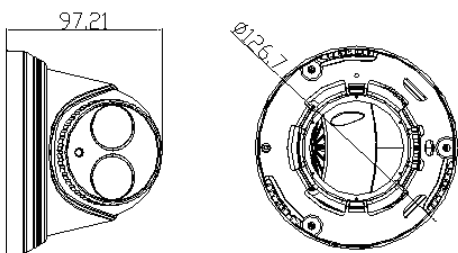

	CMIP1122	CMIP1122 -28
<b>Camera</b>		
Image sensor	1/2.8" progressive scan CMOS	
Min. illumination	0.01Lux @(F1.2,AGC ON) 0 Lux with IR	
Shutter time	1/3s ~ 1/100,000s	
Lens	4mm@F2.0 Angle of view: 79°	2.8mm@F2.0 Angle of view: 86°
Lens mount	M12	
Angle adjustment	Horizontal: 0° ~ 360° , vertical: 0° ~ 75° , rotation: 0° ~ 360°	
Day & night	ICR	
Digital noise reduction	3D DNR	
Wide dynamic range	Digital WDR	
<b>Compression standard</b>		
Video compression	H.264 / MJPEG	
Bit rate	32 Kbps ~ 8 Mbps	
Dual stream	Yes	
<b>Image</b>		
Max. image resolution	1920 x 1080	
Frame rate	60 Hz: 30 fps (1920 × 1080), 30fps (1280 × 960), 30 fps (1280 x 720) 50 Hz: 25 fps (1920 × 1080), 25 fps (1280 × 960), 25 fps (1280 x 720)	
Image settings	Rotate mode, Saturation, Brightness, Contrast adjustable by client software or web browser	
BLC	Yes, zone optional	
ROI	Support	
<b>Network</b>		
Network storage	NAS (Support NFS, SMB/CIFS)	
Alarm trigger	Intrusion detection, Line crossing detection, Motion detection, Dynamic analysis, Tampering alarm, Network disconnect , IP address conflict, Storage exception	
Protocols	TCP/IP,ICMP,HTTP,HTTPS,FTP,DHCP,DNS,DDNS,RTP,RTSP,RTCP,PPPoE,NTP,UPnP,SMTP,SNMP,IGMP,802.1X,QoS,IPv6,Bonjour	
System compatibility	ONVIF, PSIA, CGI, ISAPI	
General functionalities	One-key reset, Flash-prevention, dual stream, heartbeat, mirror, password protection, privacy mask, watermark, IP address filtering, Anonymous access	
<b>Interface</b>		
Communication interface	1 RJ45 10M/100M Ethernet interface	
<b>General</b>		
Operating conditions	-22° F ~ 140° F(-30° C ~ 60° C) humidity 95% or less (non-condensing)	
Power supply	12 VDC ± 10%, PoE (802.3af)	
Power consumption	Max. 7.5W	
Ingress protection	IP66	
IR range	About 65 to 100ft(20-30m)	
Dimensions	Φ5.0 "× 3.8" (Φ126.7 x 97.2 mm)	
Weight	1.3lb(570g)	