


# CMIP2912


## 1.3 MP Network Box Camera

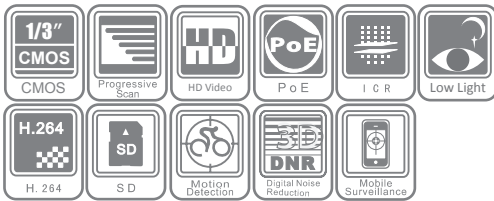

### Key features

- Up to 1.3 megapixel (1280 x 960) high resolution
- Super low-light
- HD720P real-time video output
- True day / night
- 3D digital noise reduction

### Dimensions

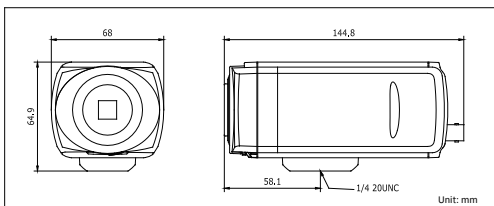

CMIP2912	
<b>Camera</b>	
Image sensor	1/3" Sensor
Min. illumination	Color: 0.01 lux@F1.2, AGC ON B/W: 0.001 lux@F1.2, AGC ON
Shutter time	1/30s ~ 1/100,000s
Lens mount	C/CS mount
Auto iris	DC drive
Day & night	IR cut filter with auto switch
Digital noise reduction	3D DNR
<b>Compression standard</b>	
Video compression	H.264 / MPEG4 / MJPEG
Bit rate	32 Kbps ~ 16 Mbps
Audio compression	G.711 / G.726
Dual stream	Yes
<b>Image</b>	
Max. image resolution	1280×960
Frame rate	60 Hz: 30 fps (1920 x 960), 30 fps (1280 x 720) 50 Hz: 25 fps (1920 x 960), 25 fps (1280 x 720)
Image settings	Saturation, brightness, contrast adjustable through client software or web browser
<b>Network</b>	
Network storage	NAS (iSCSI optional)
Alarm trigger	Motion detection, tampering alarm, network disconnect, IP address conflict, storage exception
Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, SNMP, HTTPS, FTP, 802.1x, Qos (SIP, SRTP, IPv6 optional)
Security	User authentication, watermark
System compatibility	ONVIF, PSIA, CGI
<b>Interface</b>	
Audio input	1-ch 3.5 mm audio interface, MIC IN/LINE IN
Audio output	1-ch 3.5 mm audio interface (line level, 600 Ω)
Communication interface	1 RJ45 10M / 100M ethernet interface, 1 RS-485 interface
Alarm input	1
Alarm output	1
Video output	1 Vp-p composite output (75 Ω / BNC)
On-board storage	Built-in SD/SDHC slot, up to 32 GB
Reset button	Yes
<b>General</b>	
Operating conditions	14° F ~ 140° F (-10° C ~ 60° C) Humidity 90% or less (non-condensing)
Power supply	12 VDC ± 10%, PoE (802.3af)
Power consumption	Max.5.5W(max. 8.5W with IR cut filter on)
Dimensions	2.7" × 2.2" × 5.7" (68.0× 64.9 × 144.8 mm)
Weight	1.1 lbs(500g)