


CMIP3333-Z


3 MP Outdoor Dome Network Camera

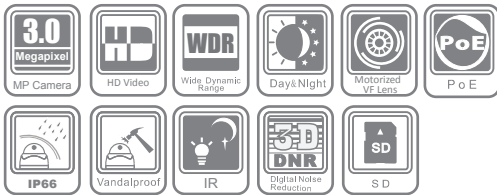

Key features

- 3.0 mega-pixel (2048 x 1536) with HD video
- 120dB wide dynamic range
- Super low-light
- Motorized VF lens
- 3D digital noise reduction
- Vandal-proof housing
- IP66 rating
- IR LEDs
- Built-in fan

Dimensions

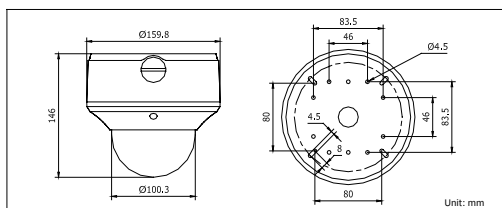

| CMIP3333-Z | |
|-----------------------------|--|
| Camera | |
| Image sensor | 1/3" sensor |
| Min. illumination | 0.17 lux @F1.6, AGC on 0 lux with IR |
| Shutter time | 1/25s ~ 1/100,000s |
| Lens | 2.7 ~ 9 mm @F1.6, Angle of view: 101° ~ 30.4° |
| Lens mount | φ14 |
| Auto iris | DC drive |
| Day & Night | IR cut filter with auto switch |
| Wide dynamic range | 120dB |
| Digital noise reduction | 3D DNR |
| Compression Standard | |
| Video compression | H.264 / MPEG4 / MJPEG |
| Bit rate | 32 Kbps ~ 16 Mbps |
| Dual stream | Yes |
| Image | |
| Max. Image Resolution | 2048 × 1536 |
| Frame rate | 60Hz: 15fps (2048 × 1536), 30fps (1920 × 1080), 30fps (1280 × 720) 50Hz: 12.5fps (2048 × 1536), 25fps (1920 × 1080), 25fps (1280 × 720) |
| Image settings | Saturation, Brightness, Contrast adjustable by client software or web browser |
| Network | |
| Network storage | NAS (iSCSI optional) |
| Alarm trigger | Motion detection, tampering alarm, network disconnect, IP address conflict, storage exception |
| Protocols | TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, SNMP, HTTPS, FTP, 802.1x, Qos (SIP, SRTP, IPv6 optional) |
| Security | User authentication, watermark |
| System compatibility | ONVIF |
| Interface | |
| Communication interface | 1 RJ45 10 M / 100 M Ethernet interface |
| Video output | 1 Vp-p composite output (75 Ω/RCA) |
| On-board storage | Built-in Micro SD slot, up to 32 GB |
| Reset button | Yes |
| General | |
| Operating conditions | -13 ° F ~ 140 ° F (-25 ° C ~ 60 ° C) Humidity 95% or less (non-condensing) |
| Power supply | 24 VAC ± 10%, PoE (802.3af) |
| Power consumption | Max. 12W |
| Impact protection | IEC60068-2-75Eh, 50J; EN50102, up to IK10 |
| Weather proof rating | IP66 |
| IR range | Approx. 65 ~ 100ft (About 20~30m) |
| Dimensions | φ6.29" × 5.75" (φ159.8 × 146 mm) |
| Weight | 4.62 lbs (2100g) |