

CMIP5333-S


3.0MP VF IR Bullet Network Camera



Key features

- Up to 3 megapixel (2048 x 1536) resolution
- Full HD1080p real-time video
- Vari-focal lens
- IR LEDs (up to 100ft, about 30m)
- DWDR & 3D DNR & BLC
- IP66 protection
- Onboard storage (up to 32GB)
- Audio I/O, Alarm I/O

Dimensions

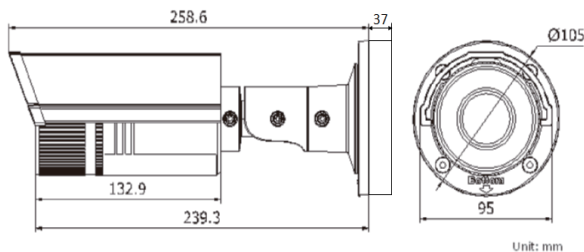

Unit: mm

CMIP5333-S	
Camera	
Image sensor	1/3" sensor
Min. illumination	0.7 lux@F1.2, AGC on 0 lux with IR
Shutter time	1/25s ~ 1/100,000s
Lens	2.8 ~ 12 mm @F1.4, angle of view: 98° ~ 30.5°
Auto iris	DC drive
Day & night	ICR
Digital noise reduction	3D DNR
Wide dynamic range	Digital WDR
Backlight compensation	Yes,zone configurable
Compression standard	
Video compression	H.264 / MJPEG
H.264 compression profile	Main profile
Bit rate	32 Kbps ~ 16 Mbps
Audio Compression	G.711/G.726
Audio Bit Rate	64Kbps(G.711)/16Kbps(G.726)
Image	
Max. image resolution	2048 × 1536
Frame rate	60Hz: 15fps (2048 x 1536), 30fps (1920 × 1080), 30fps (1280 x 720) 50Hz: 12.5fps (2048 x 1536), 25fps (1920 × 1080), 25fps (1280 x 720)
Image settings	Saturation, brightness, contrast adjustable through client software or web browser
Network	
Network storage	NAS (iSCSI optional)
Alarm trigger	Motion detection,tampering alarm
Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, SNMP, HTTPS, FTP, 802.1x, Qos (SIP, SRTP, IPv6 optional)
System compatibility	ONVIF, PSIA, CGI
General functionalities	Dual stream,user authentication,watermark
Interface	
Communication interface	1 RJ45 10M / 100M ethernet port
On-board storage	Built-in Micro SD card slot, up to 32 GB
General	
Operating conditions	-22 ° F ~ 140 ° F(-30 ° C ~ 60 ° C), humidity 95% or less (non-condensing)
Power supply	DC12V ± 10%, PoE (802.3af)
Power consumption	Max. 5.5W(7.5W with ICR on)
Ingress protection level	IP66
IR range	Up to 100ft(About 30 meters)
Dimensions	Φ4.13" × 11.64"(Φ 105 × 295.6mm)
Weight	2.65 lb(1200g)