

CMIP5353-Z


5 MP IR VF Bullet Camera



Key features

- 5 megapixel (2560 x 1920) high resolution
- Full HD1080p real-time video
- True day / night
- IP66 rating
- IR range: up to 65~100ft(About 20~30m)
- Motorized VF lens

Dimensions

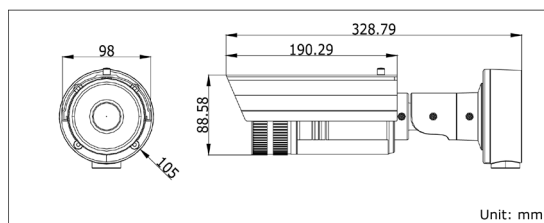

CMIP5353-Z	
Camera	
Image sensor	1/2.5" sensor
Min. illumination	1 lux@F1.6, AGC on, 0 lux with IR
Shutter time	1/25s ~ 1/100,000s
Lens	3.5 ~ 9 mm @F1.6, angle of view: 92° ~ 36°, Motorized VF Lens
Lens mount	Φ14
Auto iris	DC drive
Day & night	IR cut filter with auto switch
Compression Standard	
Video compression	H.264 / MPEG4 / MJPEG
Bit rate	32 Kbps ~ 16 Mbps
Dual stream	Yes
Image	
Max. resolution	2560 x 1920
Frame rate	60HZ:7.5fps (2560 x 1920), 15fps (2048 x 1536), 30fps (1920 x 1080), 30fps (1600 x 1200), 30fps (1280 x 720) 50HZ:6.25fps (2560 x 1920), 12.5fps (2048 x 1536), 25fps (1920 x 1080), 25fps (1600 x 1200), 25fps (1280 x 720)
Image settings	Saturation, brightness, contrast adjustable through client software or web browser
Network	
Network storage	NAS (iSCSI optional)
Alarm trigger	Motion detection, tampering alarm, network disconnect, IP address conflict, storage exception
Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, SNMP, HTTPS, FTP, 802.1x, Qos (SIP, SRTP, IPv6 optional)
Security	User authentication, watermark
Interface	
Communication interface	1 RJ45 10M / 100M ethernet interface
General	
Operating conditions	14° F ~ 140° F (-10° C ~ 60° C) Humidity 90% or less (non-condensing)
Power supply	12 V DC ± 10%, PoE (802.3af)
Power consumption	Max. 14W
Weather proof rating	IP66
IR range	Approx. 65~100ft(20 ~ 30m)
Dimensions	3.86" × 3.49" × 12.94" (98.0 × 88.6 × 328.8 mm)
Weight	3.75 lbs(1700g)