

# CMIP7532FW


## 3 MP WDR Fisheye Network Camera



### Key features

- 1/3" sensor
- 3 megapixel image sensor
- Up to 2048 x 1536 real-time streaming
- 360° view angel
- Multiple viewing modes
- Multiple ePTZ streams with preset and patrol functions
- Up to 33ft(10m) IR range

### Dimensions

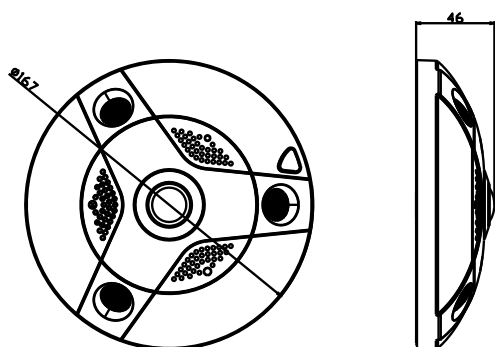

CMIP7532FW	
<b>Camera</b>	
Image Sensor	1/3" sensor
Min. Illumination	0.1Lux @ (F1.2,AGC ON),0.28Lux @ (F2.0,AGC ON ) 0 lux with IR
Shutter Speed	1/25 s to 1/100,000 s
Slow Shutter	Support
Lens	1.19mm @F2.0, angle of view: 360°
Lens mount	M12
Day & Night	ICR
Digital Noise Reduction	3D DNR
Wide dynamic range	120dB WDR
<b>Compression Standard</b>	
Video Compression	H.264/MPEG4/MJPEG
H.264 Type	Baseline Profile / Main Profile / High Profile
Video Bit Rate	32 Kbps – 16 Mbps
<b>Image</b>	
Max. Resolution	2048×1536
Frame Rate	High-frame Mode: support 60Hz: 1 × fisheye (2048×1536, 30fps) or (1536 × 1536, 30fps) or 4 × PTZ (800 × 600, 30fps) 50Hz: 1 × fisheye (2048×1536, 25fps) or (1536×1536, 25fps) or 4 × PTZ (800 × 600, 25fps) Multi-channel Mode: support 60Hz: 1 × fisheye (1536 × 1536, 20fps) and 1 × panoramic (1600×1200, 20fps) and 3 × PTZ (800×600, 20fps) 50Hz: 1 × fisheye (1536 × 1536, 20fps) and 1 × panoramic (1600 × 1200, 20fps) and 3 × PTZ (800 × 600, 20fps)
Image Setting	Saturation, Brightness, Contrast, Hue, Sharpness, AGC, White Balance
High Light Compensation	Support
Day/night Switch	Auto / Manual / Scheduled / Alarm trigger
<b>Network</b>	
Network Storage	NAS
Alarm trigger	Motion detection, dynamic analysis, tamper alarm, network disconnect, IP address conflict,storage full, storage error
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP,SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour
Security	User Authentication, Watermark, IP address filtering, Anonymous access
Standard	ONVIF, PSIA, CGI
<b>Interface</b>	
Communication Interface	1 RJ45 10M/100M Ethernet port
On-board storage	Built-in Micro SD/SDXC slot, up to 64 GB
<b>General</b>	
Operating Conditions	-22 ° F – 140 ° F(-30 ° C – 60 ° C ) Humidity 95% or less (non-condensing)
Power Supply	DC12V±10% / PoE
Power Consumption	Max. 11W
IR range	Max. 33ft(10m)
Protection	IEC 60068-2-75 test, Eh, 50J; EN 50102, EN50155
Dimensions	Φ6.6" × 1.8" (Φ167.0 × 46.0mm)
Weight	1.7lb(800g)