


CMIP8222


IR Mini Bullet Camera

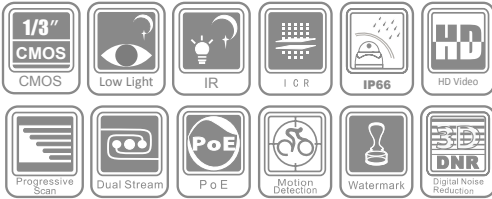

Key features

- 2.0 megapixel high resolution
- HD video output
- Video Content Analytics(VCA)
- Region of Interest(ROI)
- 3D DNR & DWDR & BLC
- IP66 rating
- IR range: up to 100ft(30m)
- IR cut filter with auto switch

Dimensions

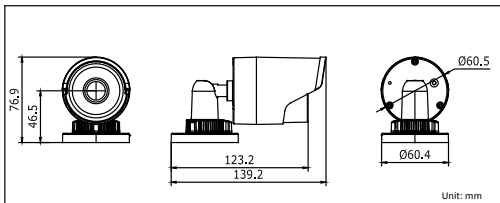

CMIP8222	
Camera	
Image sensor	1/3" sensor
Min. illumination	0.07 lux @F1.2, AGC ON, 0 lux with IR
Shutter time	1/25s ~ 1/100,000s
Lens	4mm @F2.0 Angle of view: 79°
Lens mount	M12
Day & night	IR cut filter with auto switch
Digital noise reduction	3D DNR
Compression Standard	
Video compression	H.264 / MJPEG
Bit rate	32 Kbps ~ 8Mbps
Dual Stream	Yes
Image	
Max. Image Resolution	1920 × 1080
Frame rate	60Hz: 30fps (1920 × 1080), 30fps (1280 × 960), 30fps (1280 × 720) 50Hz: 25fps (1920 × 1080), 25fps (1280 × 960), 25fps (1280 × 720)
Image settings	Rotate mode, Saturation, Brightness, Contrast adjustable by client software or web browser
BLC	Yes, zone optional
ROI	Yes, up to 4 configurable areas
Network	
Network storage	NAS
Alarm trigger	Motion detection, Dynamic analysis, Tampering alarm
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour
Interoperability	ONVIF, PSIA, CGI, ISAPI
Security	User Authentication, Watermark
Interface	
Communication interface	1 RJ45 10 M / 100 M Ethernet interface
Reset Button	Yes
General	
Operating conditions	-22° F ~ 140° F (-30° C ~ 60° C) humidity 95% or less (non-condensing)
Power supply	12 VDC ± 10% , PoE (802.3af)
Power consumption	Max. 7W
Weather proof rating	IP66
IR range	Up to 100ft(30m)
Dimension	2.4" × 3.0" × 5.5" (60.5 x 76.9 x 139.2mm)
Weight	1.1lbs(500g)