


CMR6313


1.3 Mega Sensor IR Bullet Camera

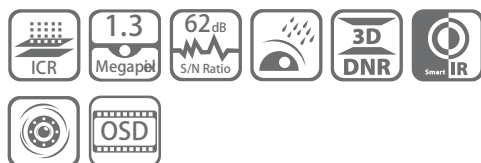

Key features

- 1/3" Sensor
- Effective pixel: 1280 x 960
- 2.8 – 12mm vari-focal lens
- True Day/Night
- Up to 40m IR distance
- Up The Coax(via coaxial cable)
- OSD menu, 3D DNR & Smart IR
- IP66 weatherproof

Dimensions

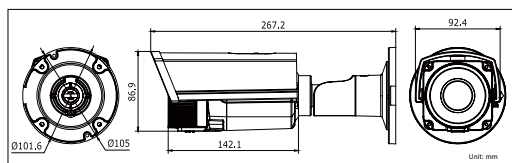

| CMR6313 | |
|----------------------------------|--|
| Camera | |
| Image Sensor | 1/3" 1.3 Mega Sensor |
| Signal System | NTSC/PAL |
| Effective Pixels | 1280 (H) × 960 (V) |
| Min. Illumination | 0.14 Lux (AGC ON), 0 Lux with IR |
| Shutter speed | NTSC: 1/30 s to 1/30,000 s PAL: 1/25 s to 1/25,000 s |
| Lens | 2.8-12mm |
| Day & Night | ICR |
| Synchronization | Internal synchronization |
| Video Output | 1Vp-p composite output (75 Ω/BNC) |
| S/N Ratio | More than 62 dB |
| Menu | |
| Lens Type | Auto Iris/ELC/ELC&ALC |
| Automatic Exposure | Globe AE/DWDR |
| AGC | Low/Middle/High/Off |
| Slow Shutter | Support |
| White Balance | Auto/Manual |
| D/N Mode | Color/BW/SMART IR |
| 3D DNR | Low/Middle/High/Off |
| Motion Detection | Support, maximum 4 zones |
| Privacy Mask | On/Off, maximum 8 zones |
| UTC Function | Support |
| Language | English/Chinese |
| Function | Digital Wide Dynamic Range, 3D Digital Noise Reduction, Sharpness, Brightness, Saturation, Resolution, Digital Zoom, Mirror, Reset, etc. |
| General | |
| Working Temperature/ Humidity | -20 ° C - 60 ° C (-4 ° F - 140 ° F) Humidity 90% or less (non-condensing) |
| Power Supply | 12 VDC |
| Power Consumption | Max. 5 W |
| Ingress Protection | IP66 |
| IR Range | 131ft(40m) |
| Dimensions | 105 × 86.9 × 267.2mm(φ 4.13" x 3.42" x 10.52") |
| Weight | 1350g (2.97 lb) |