

CMR6373


700TVL IR Bullet Camera



Key features

- Aptina Sensor
- 700 TVL horizontal resolution
- 2.8 -12mm vari-focal lens
- True Day/Night
- Up to 40m IR distance
- Smart IR mode
- IP66 weatherproof
- Wide operating temperature range

Dimensions

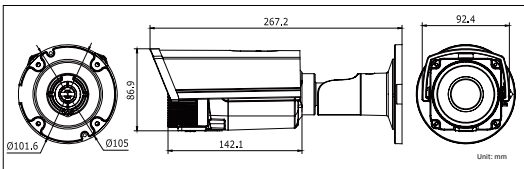

| CMR6373 | |
|----------------------------------|------------------------------------------------------------------------------|
| Camera | |
| Image Sensor | Aptina Sensor |
| Signal System | NTSC/PAL |
| Effective Pixels | NTSC: 720 (H) × 480 (V); PAL: 720 (H) × 582(V) |
| Min. Illumination | 0.14 Lux @ (AGC ON),0 Lux with IR |
| Shutter speed | NTSC: 1/30 s to 1/30,000 s PAL: 1/25 s to 1/25,000 s |
| Lens | 2.8-12mm |
| Day & Night | ICR |
| Horizontal Resolution | 700TVL |
| Synchronization | Internal synchronization |
| Video Output | 1Vp-p composite output (75Ω/BNC) |
| S/N Ratio | More than 62 dB |
| General | |
| Working Temperature/ Humidity | -40 ° C - 60 ° C (14 ° F - 140 ° F) Humidity 90% or less (non-condensing) |
| Power Supply | 12 VDC |
| Power Consumption | Max. 6.5 W |
| Ingress Protection | IP66 |
| IR Range | 131ft(40 m) |
| Dimensions | 105 × 86.9 × 267.2mm(φ 4.13" x 3.42" x 10.52") |
| Weight | 1350g (2.97 lb) |