


CMR6373D


700TVL IR Bullet Camera

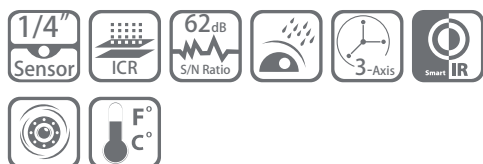

Key features

- Aptina Sensor
- 700 TVL horizontal resolution
- 2.8 -12mm vari-focal lens
- True Day/Night
- Up to 40m IR distance
- Smart IR mode
- IP66 weatherproof
- Wide operating temperature range

Dimensions

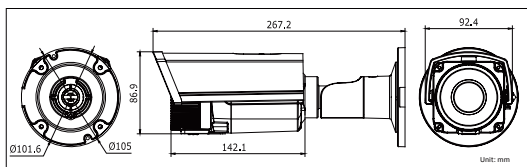

CMR6373D	
Camera	
Image Sensor	Aptina Sensor
Signal System	NTSC/PAL
Effective Pixels	NTSC: 720 (H) × 480 (V); PAL: 720 (H) × 582(V)
Min. Illumination	0.14 Lux @ (AGC ON),0 Lux with IR
Shutter speed	NTSC: 1/30 s to 1/30,000 s PAL: 1/25 s to 1/25,000 s
Lens	2.8-12mm
Day & Night	ICR
Horizontal Resolution	700TVL
Synchronization	Internal synchronization
Video Output	1Vp-p composite output (75Ω/BNC)
S/N Ratio	More than 62 dB
General	
Working Temperature/ Humidity	-40 ° C - 60 ° C (14 ° F - 140 ° F) Humidity 90% or less (non-condensing)
Power Supply	12V DC, 24V AC
Power Consumption	Max. 6.5 W
Ingress Protection	IP66
IR Range	131ft(40m)
Dimensions	105 × 86.9 × 267.2mm(φ 4.13" x 3.42" x 10.52")
Weight	1350g (2.97 lb)