

CMSD2422 CMSD2422B


1080P HD-SDI IR Camera



Key features

- 2 Mega Pixels
- 1/2.8" Sensor
- 3.6mm Mega Pixel Lens
- 24pcs IR LEDs, 65ft(20m)
- Mechanical IR Cut Filter
- Aluminum housing
- DC 12V input

Dimensions

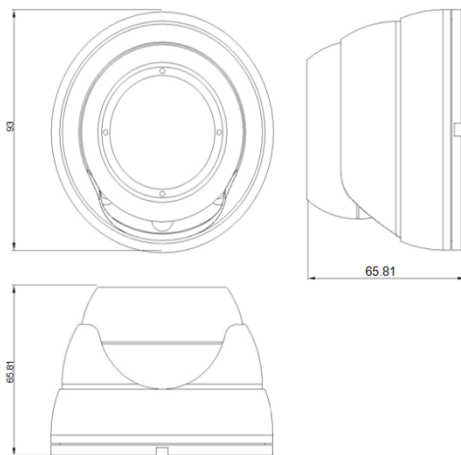

CMSD2422 CMSD2422B	
Camera	
Image Sensor	1/2.8" Sensor
Signal System	NTSC/PAL
Effective Pixels	2.0 Mega Pixels
Min. Illumination	0 Lux(Infrared Lamps Turn on)
Shutter Speed	NTSC: 1/30-1/50,000
	PAL: 1/25-1/50,000
Lens	3.6mm Fixed Mega Pixel Lens
Day & Night	ICR
Horizontal Resolution	NTSC:1920X1080P / 30 fps, PAL:1920X1080P / 25fps
Synchronization	Internal
Video Output	1.0Vp~p(75Ω)
S/N Ratio	> 50dB (AGC off)
Digital Noise Reduction	2D DNR & 3D DNR
White Balance	Auto Tracking White Balance
BLC	Auto
Auto Gain Control	Auto
Smart IR	Yes
General	
Working Temperature	-10°C ~ 50 °C
/Humidity	RH85% Max. (Non-condensing)
Power Supply	DC 12V
Power Consumption	< 5W(when the infrared lamps turn on)
Weather-proof rating	IP66
Infrared Red Lamps	24pcs
IR Range	65ft(20m)
Dimension	93mm x 93mm x 65.8mm
Weight	330g(0.73 lbs)