

CMT2073P/CMT2073BP


700 TVL IR Dome Camera



Key features

- 700TVL
- 1/3" Sensor
- 2.8-12mm Varifocal Lens
- 36 IR LEDs up to 100ft (30m)
- Plastic housing
- DC 12V input

Dimensions

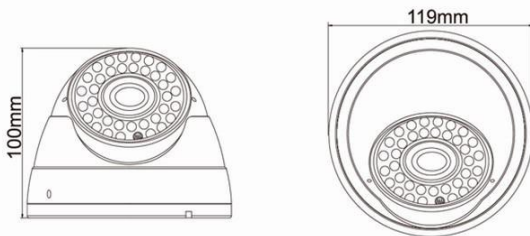

	CMT2073P CMT2073PB
Camera	
Image Sensor	1/3" Sensor
Signal System	NTSC/PAL
Effective Pixels	NTSC:960(H)*494(V); PAL:960(H)*582(V)
Min. Illumination	0 Lux(Infrared Lamps Turn on)
Shutter Speed	NTSC: 1/60-1/100,000
	PAL: 1/50-1/100,000
Lens	2.8-12mm Varifocal
Day & Night	ICR
Horizontal Resolution	700 TVL
Synchronization	Internal
Video Output	1 BNC, 1.0 Vp-p, 75 Ohm Composite
S/N Ratio	> 50dB (AGC off)
White Balance	Auto Tracking White Balance
BLC	Auto
Auto Gain Control	Auto
Smart IR	Yes
General	
Working Temperature	-10°C ~ 50°C
Humidity	RH90% Max. (Non-condensing)
Power Supply	DC 12V
Power Consumption	< 2W (LED OFF) / < 6W (LED ON)
Weather-proof rating	
Infrared Red Lamps	36pcs
IR Range	100ft(30m)
Dimension	119 x100mm(4.7"x3.9")
Weight	280g(0.62 lbs)