


# CMT2712


## 1.3 Mega Matrix IR Dome Camera

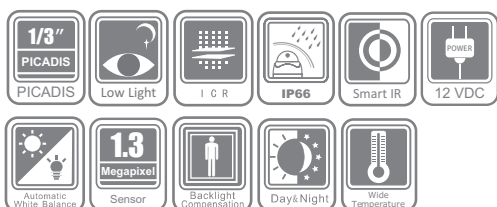

### Key features

- 1/3" Sensor
- 1280 (H) x 960 (V) Effective Pixels
- True Day/Night
- 131ft IR Distance
- Smart IR
- IP66 Weatherproof
- Wide Operating Temperature Range

### Dimensions

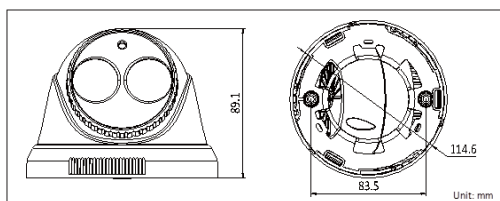

CMT2712	
<b>Camera</b>	
Image Sensor	1/3" Sensor
Signal System	NTSC/PAL
Effective Pixels	1280 (H) × 960 (V)
Min. Illumination	0.1 Lux @ (F1.2,AGC ON),0 Lux with IR
Shutter speed	NTSC: 1/30 s to 1/30,000 s PAL: 1/25 s to 1/25,000 s
Lens	3.6mm
Day & Night	IR cut filter with auto switch
Synchronization	Internal synchronization
Video Output	1Vp-p composite output (75 Ω/BNC)
S/N Ratio	More than 62 dB
BLC	On
<b>General</b>	
Working Temperature/ Humidity	-40 ° C - 60 ° C (-40 ° F - 140 ° F) Humidity 90% or less (non-condensing)
Power Supply	12 V DC
Power Consumption	Max. 5 W
Ingress Protection	IP66
IR Range	131ft(40m)
Dimensions	Φ114.6× 89.1mm( Φ 4.5" ×3.5" )
Weight	300 g (0.66 lbs)

### Available models

CMT2712