


# ED8004TSPR / ED8008TSPR

## 5MP 5-IN-1 DVRs Titanium GUI

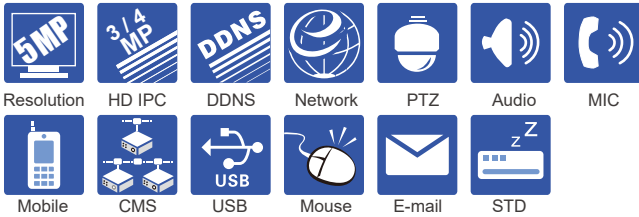

### Introduction:


ED800TSPR series are 4 / 8 CH 5MP high definition hybrid DVRs with the ability to connect analog and IP cameras simultaneously, which adopts the standard H.264 high profile compression format and the most advanced SOC technique to ensure real time recording in each channel and realize outstanding robustness of the system.

ED800TSPR supports 4 / 8 CH video input, audio I/O, up to 5 / 12CH IPC input, simultaneous 4 / 8 CH playback. The series of product can meet different security requirements of home, financial, commerce, enterprise, transportation and government, etc.

### Main Feature:

- 4 / 8 CH TVI / CVI / AHD video input
- 4 / 8 CH 5MP / 4MP / 4MP lite / 3MP / 1080P / 720P / WD1 recording
- 1 / 4 CH IPC (4MP) / 3MP / 1080P / 960P / 720P recording. Up to 5 / 12CH IPC Input
- Adopt standard H.264 high profile compression format to get high-quality video at much lower bit rate
- Intuitive and user-friendly Graphics User Interface ( GUI ), window style operation by mouse
- Multi-mode recording: manual / timer / motion / sensor
- Playback : 4 / 8 CH simultaneously playback
- Search: time slice, time, event ( manual, sensor, motion ), tag search Express and flexible backup via USB, network and so on
- Pentaplex: preview, record, playback, backup and remote access
- DHCP, DDNS, PPPoE network protocol, IE browse and CMS supported
- Remote control via IE or CMS : preview, playback, backup, PTZ and configuration
- Dual stream technology for local storage with high definition, remote network transmission and remote surveillance with mobile device
- Multi-user online simultaneously
- Authorization management, log review and device status review
- HDMI 4K output, true high resolution display
- Support PTZ preset and auto cruise, up to 255 presets and 8 cruises
- Support NAT function and QRCode scanning by mobile phone and PAD
- Powerful smart phone & Pad surveillance with iOS and Android OS

### Physical Interfaces:

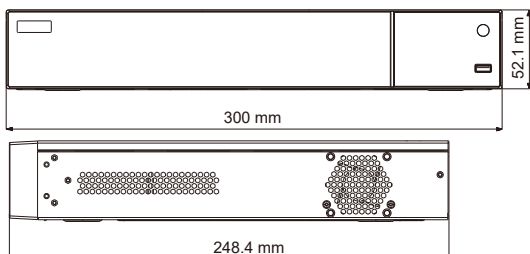

Design and specifications are subject to change without notice.

Model	ED8004TSPR	ED8008TSPR
<b>System</b>		
Compression	Standard H.264 High Profile	
CPU	Cortex A7	Cortex A9
OS	Embedded Linux	
<b>Video</b>		
Input	BNC × 4	BNC × 8
Resolution	TVI / AHD : 5MP@20fps; 4MP, 3MP, 1080P, 720P, WD1 real time CVI : 1080P, 720P real time	
IP Input	IPC × 1 (Up To 5)	IPC × 4 (Up To 12)
Access Bandwidth	6Mbps, Up to 26Mbps	24Mbps, Up to 56Mbps
Output	HDMI × 1: 2560 × 1440, 1920 × 1080, 1280 × 1024 VGA × 1: 1920 × 1080, 1280 × 1024 BNC × 1: CVBS ( used as the main or spot out )	HDMI × 1: 4K × 2K, 1920 × 1080, 1280 × 1024 VGA × 1: 1920 × 1080, 1280 × 1024 BNC × 1: CVBS ( used as spot out )
<b>Audio</b>		
Input / Output	RCA × 4 / RCA × 1	RCA × 1 / RCA × 1
Two-way audio	Take up channel one audio input	
<b>Record</b>		
Resolution	5MP, 4MP, 3MP, 1080P, 720P, WD1	
Frame Rate	5MP: 10fps (PAL / NTSC) 4MP / 3MP: 12 fps (PAL) / 15 fps (NTSC) 1080P/720P/WD1: 25 fps (PAL) / 30 fps (NTSC)	5MP: 10fps (PAL / NTSC) 4MP / 3MP: 12 fps (PAL) / 15 fps (NTSC) 1080P/720P/WD1: 25 fps (PAL) / 30 fps (NTSC)
Bit Rate	768Kbps ~ 8Mbps (Per CH)	
Mode	Manual, timer, motion, sensor	
<b>IP Input</b>		
Resolution	3MP / 1080P / 960P / 720P	4MP / 3MP / 1080P / 960P / 720P
Frame Rate	25fps (PAL) / 30fps ( NTSC )	
<b>Play back</b>		
Playback	4 CH	8 CH
Search	Time slice / time / event / tag search	
Smart Search	Highlighted color to display the camera record in a certain period of time, different colors refers to different record events	
Function	Play, pause, FF, FB, digital zoom, etc.	
<b>Alarm</b>		
Mode	Manual, sensor, motion, exception	
Input / Output	4 / 1 CH	N/A
Triggering	Record, snap, preset, e-mail, etc.	
<b>Network</b>		
Interface	RJ45 10 / 100Mbps × 1	
Protocol	TCP / IP, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, SMTP	
Web Client	Multiple users online	
<b>Mobile Device</b>		
OS	iOS, Android	
<b>Storage</b>		
HDD	SATA × 1, max 8T	
<b>Backup</b>		
Local Backup	U disk, USB mobile HDD	
Network Backup	Yes	
<b>Port</b>		
RS485	RS485 × 1, connect to PTZ or keyboard	
USB	USB 2.0 × 2 ( 1 in the front and 1 in the rear )	USB 2.0 × 1 ( front ), USB 3.0 × 1 ( rear )
Remote Controller	Yes	
<b>Others</b>		
Power Supply	DC12V	
Consumption	≤ 5W ( without HDD )	≤ 10W ( without HDD )
Dimensions	11.8" × 9.8" × 2" ( 300 × 248 × 52mm ) ( W × D × H )	
Work Environment	-10 ~ 50 °C · 10% ~ 90% humidity	

www.EasternCCTV.com

### Headquarters

50 Commercial St.,  
Plainview, NY 11803

TEL: 516-870-3779 FAX: 516-390-1200

### Queens, NY

129-04 14th Ave.,  
College Point, NY 11356

TEL: 718-939-2710 FAX: 718-939-2713

### E. Los Angeles, CA

110 California Ave.,  
City of Industry, CA 91744

TEL: 626-961-8810 FAX: 626-961-8809

### N. Hollywood, CA

13761 Saticoy St.  
Panorama City, CA 91402

TEL: 818-924-9021 FAX: 818-849-5127

### Miami, FL

4515 NW 72nd Ave.  
Miami, FL 33166

TEL: 305-423-1329 FAX: 786-717-7282

### Houston, TX

3790 Westchase Dr.,  
Houston, TX 77042

TEL: 832-308-5282 FAX: 832-925-7454