


Eyemax 32CH AcuPick AI NVR System

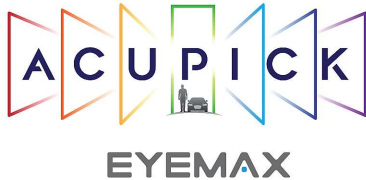

1.5U • 4 × SATA Slots • 1 × eSATA Slot • Max. 384 Mbps Bandwidth • Smart H.265+ / H.265 • Support AcuPick with Max. 16CH • 2CH Face Detection & Recognition • 4CH Perimeter Protection • 8CH SMD Plus

Overview

The series excels in performance and high-quality recording technology, making it perfect for IP video surveillance applications. Its robust processor offers ample access and forwarding bandwidth, coupled with strong decoding capabilities for seamless streaming. Featuring a built-in AI chip and advanced deep learning algorithms, this NVR supports various AI functions, including precise face recognition and perimeter protection, reducing response times to events and enhancing video interactivity. It's also compatible with a wide range of third-party devices, making it an excellent choice for surveillance systems working with Video Management Software (VMS).

AcuPick

Our cutting-edge search technology combines front-end and back-end intelligence, enabling swift and precise target location in extensive video data.

Perimeter Protection

Automatically filtering false alarms from animals, leaves, bright lights, etc., enables the system to enhance alarm accuracy through secondary target recognition.

Face Detection

Face detection identifies human faces in video using a deep learning algorithm, supporting detection, tracking, optimization, and capturing to produce the best face snapshot.

Face Recognition

Face Recognition technology extracts facial features from captured faces and matches them with the database to recognize the person's identity.

Heat Map by Camera

Heat map technology displays crowd density and people appearance probability by using various colors. It essentially provides statistical data on the quantity of people in both spatial and temporal dimensions.

ANPR by Camera

Using deep learning algorithms, our ANPR technology can recognize vehicle number plate information in images captured by ANPR cameras. It supports blacklist/allowlist modes and enables the search for target vehicles in recorded videos.

SMD Plus

Using an intelligent algorithm, Smart Motion Detection technology categorizes targets triggering motion detection and filters out alarms caused by non-concerned targets, ensuring effective and accurate alerts.

FEATURES

- Smart H.265+/H.265/Smart H.264+/H.264/MJPEG decoding format
- Max. decoding capability: 32 × 1080p@30 fps or 32 × 2MP@30 fps
- Max. 384 Mbps incoming/recording/outgoing bandwidth
- Support AcuPick with Max. 16-Channel
- Support N+M cluster
- AI by recorder: 2-channel face detection and recognition, 4-channel perimeter protection, and 8-channel SMD Plus
- AI by camera: Face detection and recognition, perimeter protection, SMD Plus, metadata, ANPR, stereo analysis, heat map, and people counting.
- Security baseline 2.3.

SPECIFICATIONS

System	
Main Processor	Industrial-grade processor
Operating System	Embedded Linux
Operating Interface	Web, Local GUI
AI	
AI by Recorder	Face detection face recognition perimeter protection SMD Plus
AI by Camera	Face detection / face recognition / video metadata (human / motor vehicles / and non-motor vehicles) / perimeter protection / SMD Plus / stereo analysis / crowd distribution / people counting / ANPR / vehicle density / heat map
AcuPick AI by Camera + Recorder	Max. 16-channel, 1 combined event per channel/s
Perimeter Protection	

Eyemax 32CH AcuPick AI NVR System

Perimeter Performance AI by Recorder (Number of Channels)	4 channels, 10 IVS rules for each channel
Perimeter Performance of AI by Camera (Number of Channels)	16 channels
Face Detection	
Face Attributes	Gender / age group / glasses / expressions / face mask / beard
Face Detection Performance of AI by Recorder (Number of Channels)	2 channels (up to 12 face images/s each channel)
Face Detection Performance of AI by Camera (Number of Channels)	16 channels
Face Recognition	
Face Database Capacity	Up to 20 face databases with 20,000 images, with a total capacity of 2.5 G. Name, gender, birthday, address, credential type, credential No., countries & regions and state can be added to each face image.
Face Recognition Performance of AI by Recorder (Number of Channels)	1. 16-channel FD (by camera) + FR (by recorder), image stream: 16 face images/s 2. 2-channel FD (by recorder) + FR (by recorder), video stream: 12 face images/s
Face Recognition Performance of AI by Camera (Number of Channels)	16 channels
SMD Plus	
SMD Plus by Recorder	8 channels: Secondary filtering for human and motor vehicle , reducing false alarms caused by leaves, rain and lighting condition change
SMD Plus by Camera	16 channels
Video Metadata	
Metadata Performance of AI by Camera (Number of Channels)	8 channels
Human Attributes	Top color, top type, bottom color, bottom type, hat, bag, age, gender and umbrella
Motor Vehicle Attributes	License plate, plate color, vehicle body, vehicle model, vehicle logo, calling, seatbelt, vehicle interior, vehicle registration location.
Non-motor Vehicle Attributes	Vehicle model, vehicle color, number of persons, helmet.
Vehicle License Plate Comparison	

Eyemax 32CH AcuPick AI NVR System

ANPR by Camera (Number of Channels)	8 channels
License Plate Database Capacity	1. Create up to 20,000 plate numbers. 2. Blocklist and allowlist
Audio and Video	
Access Channel	32
Network Bandwidth	AI disabled: 384 Mbps incoming, 384 Mbps recording and 384 Mbps outgoing AI enabled: 200 Mbps incoming, 200 Mbps recording and 200 Mbps outgoing
Resolution	32 MP / 24 MP / 16 MP / 12 MP / 8 MP / 5 MP / 4 MP / 1080p / 720p / D1 / CIF / QCIF
Decoding Capability	AI disabled: 2-channel 32 MP@20 fps; 2-channel 24 MP@20 fps; 4-channel 16 MP@30 fps; 5-channel 12 MP@30 fps; 8-channel 8 MP@30 fps; 12-channel 5 MP@30 fps; 16-channel 4 MP@30 fps; 32-channel 1080p@30 fps AI enabled: 1-channel 32 MP@20 fps; 1-channel 24 MP@20 fps; 2-channel 16 MP@30 fps; 4-channel 12 MP@30 fps; 4-channel 8 MP@30 fps; 8-channel 5 MP@30 fps; 12-channel 4 MP@30 fps; 24-channel 1080p@30 fps
Video Output	2 VGA, 2 HDMI VGA:1920 × 1080, 1280 × 1024, 1280 × 720 HDMI:3840 × 2160, 1920 × 1080, 1280 × 1024, 1280 × 720 Heterogeneous video source output for HDMI1 and HDMI2 Simultaneous video source output for VGA1 and HDMI1 Simultaneous video source output for VGA2 and HDMI2
Multi-screen Display	Main screen: 1/4/8/9/16/25/36 Sub screen: 1/4/8/9/16
Third-party Camera Access	ONVIF / Panasonic / Sony / Axis / Arecont / Pelco / Canon / Samsung
Compression Standard	
Video Compression	Smart H.265+ / H.265 / Smart H.264+ / H.264 / MJPEG
Audio Compression	G.711a / G.711u / PCM / G726
Network	
Network Protocol	HTTP / HTTPS / TCP/IP / IPv4/IPv6 / UDP / SNMP / NTP / DHCP / DNS / SMTP / UPnP / IP Filter / PPPoE / FTP / DDNS / Alarm Server / IP Search (Supports Dahua IP camera / DVR / NVS / etc.) / Multicast / P2P / Auto Registration / iSCSI

Eyemax 32CH AcuPick AI NVR System

Mobile Phone Access	iOS; Android
Interoperability	ONVIF 22.06 (Profile T; Profile S; Profile G); CGI; SDK
Browser	Chrome / IE / Safari / Edge / Firefox
Network Mode	Multi-address mode, load balance, fault tolerance and other network port binding modes
Recording Playback	
Multi-channel Playback	Up to 16 channels
Record Mode	General, motion detection; intelligent; alarm; POS
Backup Method	USB device and network
Playback Mode	Instant playback, general playback, event playback, tag playback, smart playback (face and motion detection)
Storage	
Disk Group	YES
Alarm	
General Alarm	Motion detection / privacy masking / local alarm
Anomaly Alarm	Camera offline / storage error / disk full / IP conflict / MAC conflict / login lock / abnormal behavior of fan / cybersecurity exception
Intelligent Alarm	Face detection perimeter protection face recognition video metadata (human motor vehicles and non-motor vehicles) SMD Plus stereo analysis crowd distribution people counting ANPR vehicle density heat map
Alarm Linkage	Record / snapshot (panoramic) / local alarm output / IPC external alarm output / access controller / audio / buzzer / log / preset / email
Port	
Audio Input	1-channel RCA
Audio Output	2-channel RCA
Alarm Input	16 channels
Alarm Output	6 channels (1-channel 12 V 1 A output)

Eyemax 32CH AcuPick AI NVR System

HDD Interface	4 SATA ports, each disk can contain up to 16 TB. This limit varies depending on the environment temperature.
eSATA	1
RS-232	1
RS-485	1 (half-duplex serial communication)
USB	3(1 front USB 2.0 port, 2 rear USB 3.0 ports)
HDMI	2
VGA	2
Network Port	2 (10/100/1000 Mbps Ethernet port, RJ-45)
General	
Power Supply	100–240 VAC, 50 ~ 60 Hz
Power Consumption	Total output of NVR is ≤ 13 W (without HDD)
Net Weight	4.74 kg (10.45 lb)
Gross Weight	6.11 kg (13.47 lb)
Product Dimensions	440.0 mm × 415.1 mm × 70.0 mm (17.32" × 16.34" × 2.76") (W × D × H)
Packaging Dimensions	530.0 mm × 500.0 mm × 210.0 mm (20.87" × 19.69" × 8.27")(W × D × H)
Operating Temperature	-10°C to +55°C (14°F to +131°F)
Storage Temperature	-20°C to +60°C (-4°F to +140°F)
Operating Humidity	10%–93% (RH)
Installation	Rack or desktop
Certifications	FCC: 47 CFR FCC Part15, SubpartB, Class A CE-EMC: EN 55032: 2015+A1: 2020; EN IEC 61000 ~ 3-2: 2019+A1: 2021; EN 61000 ~ 3-3: 2013+A1: 2019+A2: 2021; EN 55035: 2017+A11: 2020; EN 50130 ~ 4: 2011+A1: 2014 CE-LVD: EN 62368 ~ 1: 2014