

MEGAPIXEL LENS



3 UP TO MP

15~50mm VARI-FOCAL LENS


3M Pixel • Built-in ND filter
CS Mount Type • DV Auto Iris
Telephoto Long Focal • Wide Angle

High image-quality monitoring with optical performance supporting 3 megapixels. f15-50mm, 3.3x zooming application compatible lens. Designed to maximize optical performance with high-accuracy aspheric lens, low-dispersion glass, and high refractive-index glass. Built-in ND filter of T360, supporting high sensitivity cameras.

KEY FEATURES

- High image-quality monitoring with optical performance supporting 3 megapixels.
- f15-50mm, 3.3x zooming application compatible lens.
- Designed to maximize optical performance with high-accuracy aspheric lens, low-dispersion glass, and high refractive-index glass.
- Built-in ND filter of T360, supporting high sensitivity cameras.

DIMENSIONS

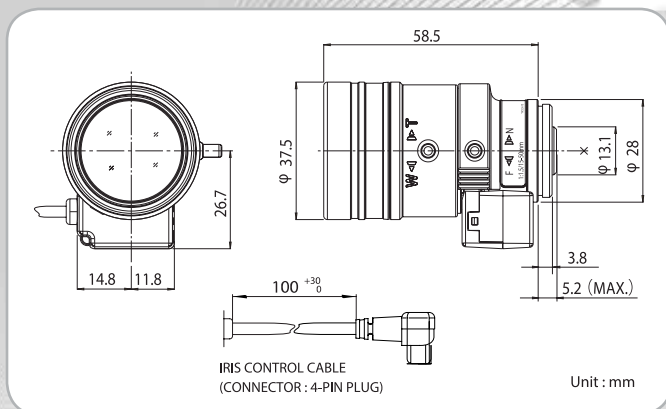

LA MPFU1550AS			
Focal Length (mm)			15~50 (3.3×)
Iris Range			F1.5 ~ T360 (Equivalent to F360)
Operation	Zoom		Manual
	Focus		Manual
	Iris		Auto (DC Type)(*1)
Angle Of View (H×V)	1/3"	WIDE	18°08' × 13°34'
		TELE	5°35' × 4°12'
	1/4"	WIDE	13°34' × 10°10'
		TELE	4°12' × 3°10'
Focusing Range (From Front Of The Lens)(m)			∞ ~ 0.8
Object Dimensions at M.O.D. (H×V)(mm)	1/3"	WIDE	271 × 202
		TELE	87 × 66
	1/4"	WIDE	202 × 151
		TELE	66 × 49
Back Focal Distance (in air)(mm)			MIN.7.7
Exit Pupil Position (From Image Plane)(mm)			-36
Filter Thread (mm)			—
Mount			CS
Mass (g)			60
Coil Resistance			Drive Coil 190Ω Damping Coil 500Ω
Currnet Consumption			23mA (Max.) at DV 4V
Remarks			·With Metal Mount (*1) When power is turned off, iris will automatically close. YV4.3×3.15SA-SA2L : Long Cable Type (230mm)