

# LTD2308SE-C


## 960H DVR



### Feature

- H.264 Dual-stream video compression
- HDMI/VGA/BNC output at up to 1920×1080P resolution
- 2CH Audio input, 1CH Audio output
- 15fps@960H / 30 fps@D1 recording
- 1x SATA HDD up to 3TB
- Mobile Phone Surveillance(iPhone, iPad, Android phone, Windows 7 phone)
- DC12V
- Compact 1U case

### Rear Panel

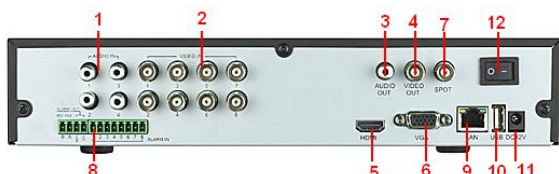

1. Audio In
2. Video In
3. Audio Out
4. Video Out
5. HDMI
6. VGA
7. Spot
8. Alarm In/Out
9. LAN interface
10. USB2.0
11. DC12V
12. Power switch

### Specification

LTD2308SE-C		
System	Compression Format	Standard H.264
	OS	Embedded Linux
Video	Input	8CH, BNC (1.0Vp-p, 75Ω)
	Standard Output	1*VGA: 1920x1080,1280x1024, 800x600, 1* BNC+1 Spot out
	Advanced Output	1*HDMI : 1080P: 1920x1080/60Hz
Audio	Audio Input	4CH, RCA (2.0 Vp-p, 1 kΩ)
	Audio Output	1CH RCA (Linear, 1 kΩ)
	Bidirectional Talk	1-ch, RCA (2.0 Vp-p, 1 kΩ) (using 1ch audio input)
Alarm	Alarm in/out	8CH/1CH
Recording	Recording Resolution	WD1/D1/CIF/QCIF
	Frame rate	15 fps@960H; 30 fps@D1
	Recording Mode	Schedule, Manual, Motion, Sensor
Playback	Max Playback Channel	8CH
	Search Mode	time, event, file
Backup	USB Disk	USB or SATA
Remote Application	Dual Stream	Support; master stream, sub-stream
	Browser	IE (windows XP/2000/Vista/7) , Safari(Mac OS) , Chrome,Firefox
	CMS	YES
	Mobile Phone	Breview for iPad/iPad2/iPhone//Android
	User Access	10 users online with professional authority management
Storage	HDD	1 x SATA, up to 3TB
Network	Ethernet	1, RJ45 10M / 100M Ethernet interface
	Protocol	TCP/IP,UDP,DHCP,DNS,PPPoE, DDNS, SMTP
Others	Power Supply	DC12V
	Consumption	≤ 10 W (without hard disk or DVD-R/W)
	Operating Temperature	-10 °C ~+55 °C
	Humidity	10% ~ 90% humidity
	Product Net Weight	<2kg
	Product Dimension	300mm x270mm x58mm
Chasis	Compact 1U chassis	