

LTD7204-FT / LTD7208-FT


HD-SDI DVRs



KEY FEATURES

- H.264 video compression
- Up to 1080P resolution recording
- HDMI and VGA output at up to 1920×1080P resolution
- Dual-stream
- Up to 4/8 synchronous playback
- NTP, SMTP, NFS, UPnP and iSCSI protocols

Rear Panel

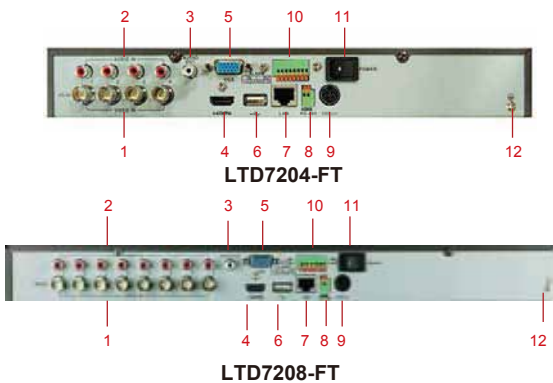

1. Video in
2. Audio in, RCA connector
3. Audio out, RCA connector
4. HDMI interface
5. VGA interface
6. USB Port
7. LAN Network interface
8. RS-485 serial interface
9. Power supply
10. Alarm
11. Power switch
12. GND

	LTD7204-FT	LTD7208-FT
Video/Audio input		
Video compression	H.264	
HD- SDI Video input	4CH	8CH
Video input interface	HD-SDI interface (800 mVp-p, 75 Ω)	
Audio compression	G.711u	
Audio input	4-ch, RCA (2.0 Vp-p, 1 kΩ)	8-ch, RCA (2.0 Vp-p, 1 kΩ)
Two-way audio input	1-ch, RCA (2.0 Vp-p, 1 kΩ) (using the audio input)	
Video/Audio output		
HDMI / VGA output	1-ch, resolution: 1080P: 1920×1080/60Hz; SXGA: 1280×1024/60Hz; 720P: 1280×720/60Hz; XGA: 1024×768/60Hz	
Encoding resolution	Main stream: 1920 × 1080 (1080P) / 1280 × 720 / VGA / 4CIF / CIF Sub-stream: 4CIF(non-real-time) / CIF / QCIF / QVGA	
Frame rate	1080P @12 fps(N); 720P/VGA/4CIF/CIF/QCIF/QVGA@30fps(N);	
Video bit rate	32 Kbps-16 Mbps	
Audio output	1-ch, RCA (Linear, 1 kΩ)	
Audio bit rate	64 Kbps	
Dual-stream	Support;	
Stream type	Video, Video & Audio	
Synchronous playback	4-ch	8-ch
Hard disk		
SATA	1 SATA interface	2 SATA interfaces
Capacity	Up to 4TB capacity	Up to 8TB capacity
External interface		
Network interface	1, RJ45 10M / 100M Ethernet interface	
Serial interface	1 RS-485 interface, half-duplex	
USB interface	2, USB2.0	
Alarm in / out	4 / 1	
General		
Power supply	12V DC	
Consumption	Max. 15 W	Max. 20 W
Working temperature	-10 °C ~ +55 °C (14 °F ~ 131 °F)	
Working humidity	10% ~ 90%	
Chassis	Compact 1U chassis	19-inch rack-mounted 1U chassis
Dimensions	315 × 230 × 45 mm (12.4 × 9.1 × 1.8 inch)	445 × 290 × 45 mm (17.5 × 11.4 × 1.8 inch)
Weight	2 kg / 4.4lb (without hard disk)	4 kg / 8.8lb (without hard disk)