

# Platinum Advanced Level 8 Channel HD-TVI DVR LTD8308K-ET




## Key Features:

- Support HDTV / HDCVI / AHD / CVBS / IP cameras
- HDMI & VGA output up to 1920x1080p resolution
- 1080p Lite@30fps with LTS Efficient mode On
- 3MP@15fps/1080P@15fps without Efficient mode(only the 1/2 channel support 3MP)

## Rear Panel:

- |                  |                  |                  |
|------------------|------------------|------------------|
| 1. Video In      | 6. HDMI          | 11. Power Switch |
| 2. Video out     | 7. USB Interface | 12. GND          |
| 3. Audio In      | 8. LAN           |                  |
| 4. Audio Out     | 9. RS-485 Serial |                  |
| 5. VGA Interface | 10. DC 12V       |                  |

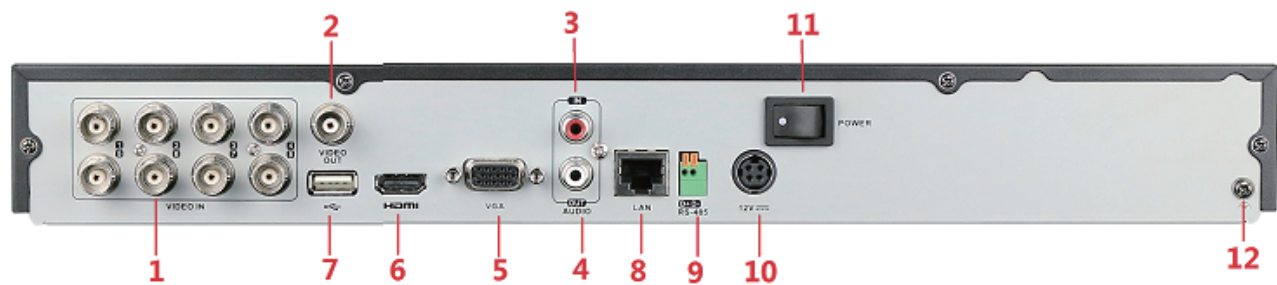

# Platinum 8CH HD-TVI DVR LTD8308K-ET

## VIDEO/ AUDIO INPUT

Video compression	H.265+/H.265/H.264 Zip+/H.264
Analog video input	8ch BNC interface (1.0Vp-p, 75 Ω), supporting coaxitron connection
HDTV input	3 MP, 1080p30, 1080p25, 720p60, 720p50, 720p30, 720p25 Note: The 3 MP signal input is only available for channel 1/2
AHD input	1080p25, 1080p30, 720p25, 720p30
HDCVI input	1080p25, 1080p30, 720p25, 720p30
CVBS input	Support
IP video input	2-ch, Up to 4 MP resolution, supports H.265+/H.265/H.264 Zip+/H.264 IP cameras
Audio compression	G.711u
Audio input	1-ch, RCA (2.0 Vp-p, 1 KΩ)

## VIDEO/ AUDIO OUTPUT

HDMI/VGA output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60 Hz
Encoding resolution	When 1080p Lite mode not enabled: 3 MP/1080p/720p/VGA/WD1/4CIF/CIF; When 1080p Lite mode enabled: 3 MP/1080p lite/720p lite/VGA/WD1/4CIF/CIF
CVBS output	1-ch, BNC (1.0 Vp-p, 75kΩ), resolution: PAL: 704 × 576, NTSC: 704 × 480
Frame rate	When 1080p Lite mode not enabled: For 3 MP stream access: 3 MP/1080p/720p/VGA/WD1/4CIF/CIF@15fps For 1080p stream access: 1080p/720p@15fps; VGA/WD1/4CIF/CIF@25fps (P)/30fps (N) For 720p stream access: 720p/VGA/WD1/4CIF/CIF@25fps (P)/30fps (N) When 1080p Lite mode enabled: 3 MP@15fps 1080p lite/720p lite/VGA/WD1/4CIF/CIF@25fps (P)/30fps (N) Sub-stream: WD1/4CIF@12fps; CIF@25fps (P)/30fps (N)
Video bit rate	32 Kbps- 6Mbps
Audio output	1-ch, RCA (Linear, 1 kΩ)
Audio bit rate	64 Kbps
Dual-stream	Support
Stream type	Video, Video & Audio
Synchronous playback	8ch

## NETWORK

Remote connections	128
Network protocols	TCP/IP, PPPoE, DHCP, PT Cloud P2P, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF

## HARD DISK

SATA	2 SATA
Capacity	Up to 6TB capacity for each disk

## EXTERNAL INTERFACE

Two-way audio input	1-ch, RCA (2.0 Vp-p, 1 KΩ) (using the 1st audio input)
Network interface	1, RJ45 10M/100M self-adaptive Ethernet interface
Serial interface	RS-485 (half-duplex)
USB port	2 × USB 2.0

## GENERAL

Power supply	DC12V
Consumption	≤ 7.5W
Working temperature	-10 ° C ~ +55 ° C (14 ° F - 131 ° F)
Working humidity	10% ~ 90%
Chassis	1U chassis
Dimensions (WxDxH)	380 × 320 × 48 mm (15.0 × 12.6 × 1.9 inch)
Weight	≤ 1.78Kg (3.91lb)