

Platinum HD TVI 8CH DVR LTD8308T-ET




Key Features:

- Support H.264+
- Support HD-TVI/AHD/Analog/IP camera
- HDMI, VGA and CVBS output up to 1920x1080p resolution
- Up to 1080p@30fps with LTS Efficient Mode ON)

Rear Panel:

- | | | |
|------------------|------------------|------------------|
| 1. Video In | 6. HDMI | 11. Power Switch |
| 2. Video out | 7. USB Interface | 12. GND |
| 3. Audio In | 8. LAN | |
| 4. Audio Out | 9. RS-485 Serial | |
| 5. VGA Interface | 10. DC 12V | |

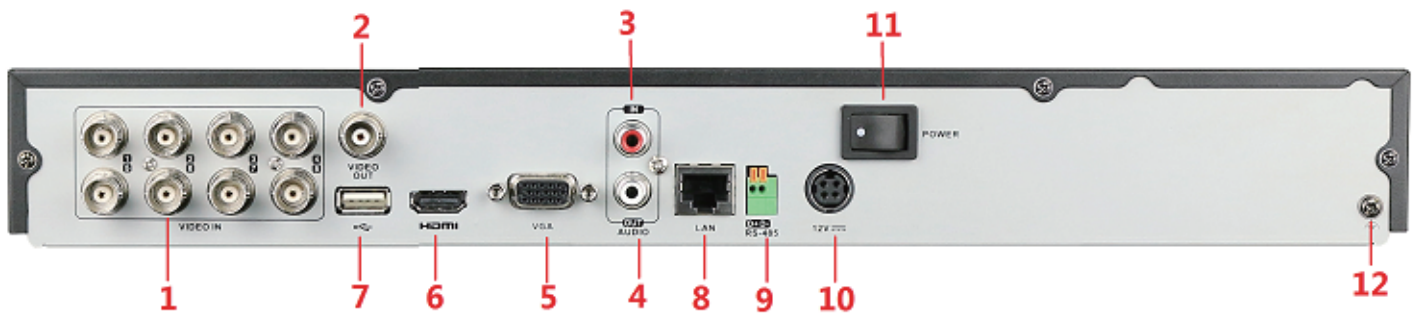

Platinum HD TVI 8CH DVR

LTD8308T-ET

| VIDEO/ AUDIO INPUT | |
|----------------------|--|
| Video compression | H.264+ |
| Video input | 8ch BNC (1.0 Vp-p, 75 Ω), PAL / NTSC self-adaptive |
| IP input | up to 2ch |
| Audio compression | G.711u |
| Audio input | 1-ch, RCA (2.0 Vp-p, 1 kΩ) |
| Two-way audio input | 1-ch, RCA (2.0 Vp-p, 1 kΩ) |
| VIDEO/ AUDIO OUTPUT | |
| HDMI/ VGA output | 1920 × 1080 |
| CVBS output | 1-ch, BNC (1.0 Vp-p, 1 kΩ) |
| Frame rate | Main stream:1/16 fps to real time frame rate Sub-stream:WD1/4CIF@12fps,CIF/QVGA/QCIF@real time frame rate |
| Video bit rate | 32 Kbps- 4Mbps |
| Audio output | 1-ch, RCA (Linear, 1 kΩ) |
| Audio bit rate | 64 Kbps |
| Dual-stream | Support |
| Stream type | Video, Video & Audio |
| Synchronous playback | 8ch |
| NETWORK | |
| Remote connections | 128 |
| Network protocols | TCP/IP, PPPoE, DHCP, DNS, DDNS, NTP, SADP, SMTP, SNMP, NFS, iSCSI, UPnP™, HTTPS |
| HARD DISK | |
| SATA | 2 SATA |
| Capacity | Up to 6TB capacity for each disk |
| EXTERNAL INTERFACE | |
| Network interface | 1:10M / 100M self-adaptive Ethernet interface |
| Serial interface | RS-485, Keyboard |
| USB port | 2 × USB2.0 |
| Alarm in/ out | - |
| GENERAL | |
| Power supply | DC12V |
| Consumption | ≤ 20W |
| Working temperature | -10 ° C ~ +55 ° C(14° F - 131° F) |
| Working humidity | 10% ~ 90% |
| Chassis | 1U chassis |
| Dimensions (WxDxH) | 380 × 320 × 45 mm (15.0 × 12.6 × 1.8 inch) |
| Weight | ≤ 2Kg (4.4lb) |