

# Platinum Enterprise Level 32 Channel HD-TVI DVR 2U LTD9232T-FA




## Key Features:

- H.264 & Dual Stream Video Compression
- 8 SATA Interfaces, up to 6TB Each
- Supports NAS, IP SAN Network Storage
- Output up to 1920×1080P Resolution
- Supports IP, HD-TVI, and Analog Cameras

## Rear Panel:

- |                            |  |
|----------------------------|--|
| 1. Video In                | 8. RS-485 Serial Interface, Keyboard Interface, Alarm In and Alarm Out |
| 2. Audio In, RCA Connector | 9. 100~240V AC Power Input   |
| 3. USB Port                | 10. Power Switch   |
| 4. HDMI Interface          | 11. GND  |
| 5. VGA Interface           | 12. Line In  |
| 6. VGA Audio Out           | 13. eSATA Interface  |
| 7. LAN Network Interface   | 14. RS-232 Serial Port   |

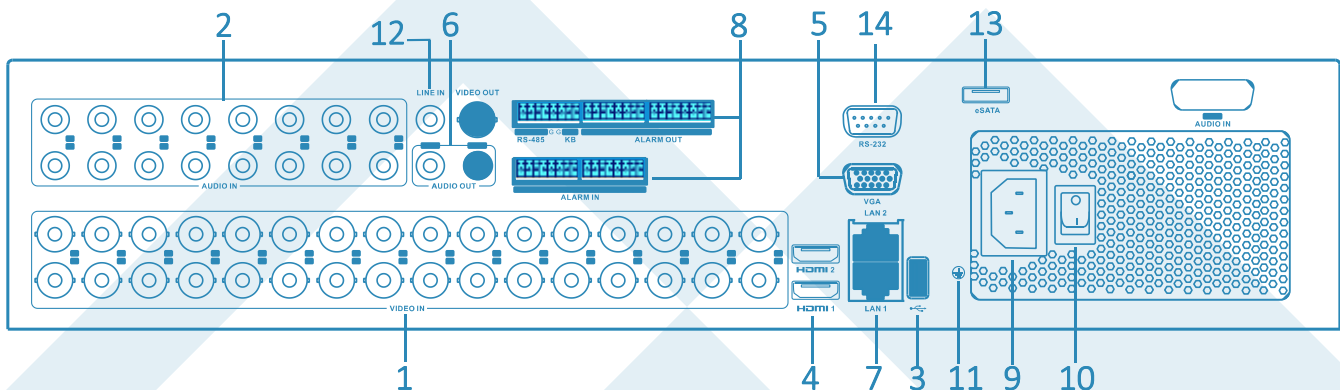

# Platinum Enterprise Level 32 Channel HD-TVI DVR

## LTD9232T-FA

### VIDEO/ AUDIO INPUT

Video Compression	H.264
Analog and HD-TVI Video Input	32CH
	BNC (1.0 Vp-p, 75 Ω), PAL / NTSC Self-Adaptive
IP Input	Up to 32CH (1080P@30fps)
Audio Compression	G.711u
Audio Input	16-CH, RCA (2.0 Vp-p, 1 kΩ)
Two-way Audio Input	1-CH, RCA (2.0 Vp-p, 1 kΩ)

### VIDEO/ AUDIO OUTPUT

HDMI/ VGA Output	1920 × 1080 / 60 Hz, 1280 × 1024 / 60 Hz, 1280 × 720 / 60 Hz, 1024 × 768 / 60HZ
Encoding Resolution	Main Stream: 1080P (Non-Real-Time) / 720P / VGA / WD1 / 4CIF / CIF Sub-Stream: WD1(12fps) / 4CIF(12fps) / CIF / QCIF / QVGA
Frame Rate	Main Stream: 1 / 16 fps ~ Real-Time Frame Rate Sub-Stream: 1 / 16 fps ~ Real-Time Frame Rate
Video Bit Rate	32 Kbps-6 Mbps
Audio Output	1CH, RCA (Linear, 1 kΩ)
Audio Bit rate	64 Kbps
Dual-Stream	Support
Stream Type	Video, Video & Audio
Synchronous Playback	32CH
Playback Resolution	1080P / 720P / VGA / WD1 / 4CIF / CIF / QVGA / QCIF

### NETWORK

Remote Connections	128
Network Protocols	TCP / IP, PPPoE, DHCP, DNS, DDNS, NTP, SADP, SMTP, SNMP, NFS, iSCSI, UPnP™, HTTPS

### HARD DISK

SATA	8 SATA Interfaces for 8 HDDs; 1 eSATA Interface
Capacity	Up to 6TB Capacity for Each Disk

### EXTERNAL INTERFACE

Network Interface	2:10M / 100M / 1000M Self-Adaptive Ethernet Interface
Serial Interface	RS-232, RS-485, Keyboard
USB Port	3 × USB2.0
Alarm In/ Out	16/ 8

### GENERAL

Power Supply	100 ~ 240VAC, 47 ~ 63HZ
Consumption	≤ 67W
Working Temperature	14°F - 131°F (-10 °C ~ +55 °C)
Working Humidity	10% ~ 90%
Casing	19in Rack-Mounted 2U Casing
Dimensions (WxDxH)	417.5 × 18.5 × 3.5in (45 × 470 × 90mm)
Weight	17.6lb (≤8kg)