


LTN0732-R8/LTN0764-R8


Embedded NVR

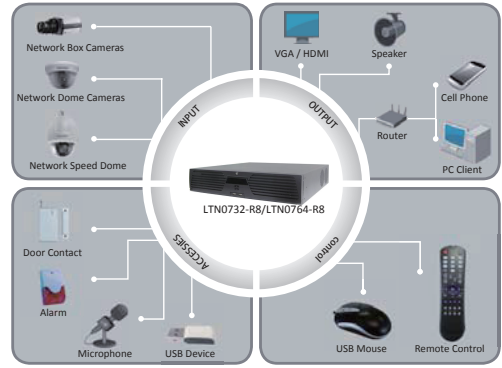

Key features

- Third-party network cameras supported
- Up to 8 Megapixels resolution recording
- HDMI and VGA output at up to 1920×1080P resolution
- 8 SATA interfaces, up to 6TB for each disk
- Support NAS, IP SAN Network Storage
- HDD quota and group management
- Dual gigabit network interfaces
- RAID 0,1,5,10 supported

Rear Panel of LTN0732-R8/LTN0764-R8

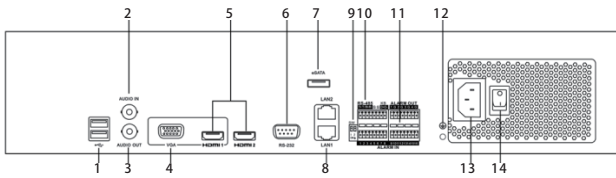

1. USB Interface
2. AUDIO IN
3. AUDIO OUT
4. VGA interface
5. HDMI1/HDMI2
6. RS-232 serial interface
7. eSATA interface
8. LAN1, LAN2 network interface
9. Termination switch
10. RS-485 serial interface, keyboard interface
11. ALARM IN and ALARM OUT
12. GND
13. 100 ~ 240VAC Power Input
14. Power Switch

	LTN0732-R8	LTN0764-R8
Video/Audio input		
IP video input	32-ch	64-ch
Two-way audio input	1-ch, BNC (2.0 Vp-p, 1 kΩ)	
Incoming bandwidth	384Mbps	768Mbps
Outgoing bandwidth	768Mbps	
Remote connection	128	
Video/Audio output		
Recording resolution	8MP/5MP/3MP/1080P/UXGA/720P/VGA / 4CIF/DCIF/2CIF/CIF/QCIF	
HDMI output	2-ch, resolution: HDMI1: 1920 × 1080P/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720 /60Hz, 1024 × 768 /60Hz HDMI2: 3840 × 2160P/60Hz, 1920 × 1080P/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720 /60Hz, 1024 × 768 /60Hz	
VGA output	1-ch, resolution: 920 × 1080P/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768 /60Hz	
Audio output	1-ch, BNC (Linear, 600 Ω)	
Playback resolution	8MP/5MP/3MP/1080P/ UXGA/ 720P/ VGA / 4CIF/DCIF/2CIF/CIF/QCIF	
Synchronous playback	16-ch	
Hard disk		
SATA	Up to 8 SATA interfaces for 4HDD+1 DVD-R/W, or 8HDDs	
eSATA	1 eSATA interface	
Capacity	Up to 6TB capacity for each disk	
Disk array		
Array type	RAID0, RAID1, RAID5, RAID10	
Number of array	8	
External interface		
Network interface	2, 10M / 100M / 1000M self-adaptive Ethernet i	
Serial interfaces	RS-232, RS-485, RS-485 keyboard interface	
USB interface	2 x USB2.0 + 2 x USB3.0	
Alarm in	16	
Alarm out	4	
General		
Power supply	100 ~ 240 VAC, 6.3A, 50 ~ 60Hz	
Consumption	≤ 100W	
Working temperature	-10° C ~ +55° C (14° F ~ 131° F)	
Working humidity	10% ~ 90%	
Chassis	19-inch rack-mounted 2U chassis	
Dimensions (WxDxH)	445 × 470 × 90 mm (17.52" × 18.5" × 3.54")	
Weight	≤ 8 kg (17.64 lb) (without hard disk or DVD-R/W)	