

Platinum Professional Level 16 Channel NVR 1U LTN8716-P16




Key Features:

- Up to 16 network cameras can be connected
- Support live view, storage, and playback of the connected camera with up to the resolution of 6 megapixels
- Up to 16 independent PoE network interfaces for different models
- Up to 2 SATA hard disks can be connected with up to 6TB capacity for each
- Support HDD quota mode

Rear Panel:

- | | |
|--------------------------|------------------------------------------|
| 1. Power Supply | 6. VGA Interface |
| 2. Audio In | 7. USB Interface |
| 3. HDMI Interface | 8. Ground |
| 4. LAN Network Interface | 9. Power Switch |
| 5. Audio Out | 10. Network Interfaces with PoE Function |

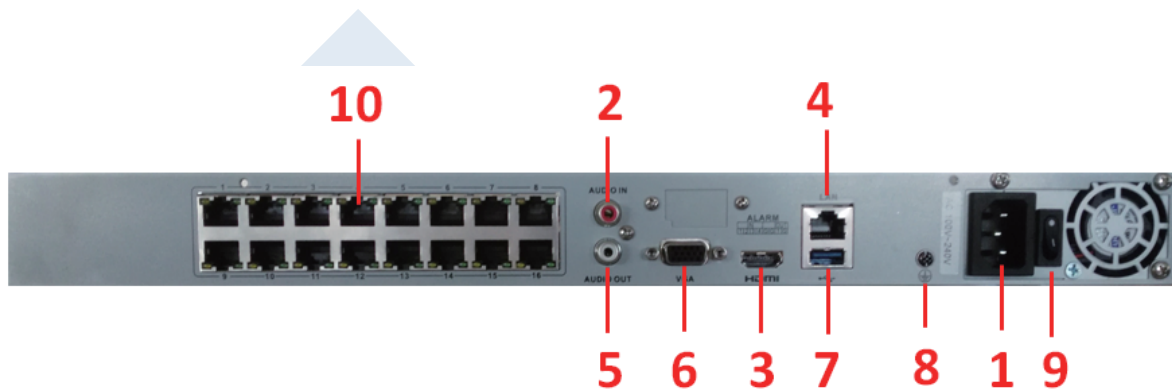

Platinum Professional Level 16 Channel NVR 1U

LTN8716-P16

Video/Audio Input	
IP video Input	16-CH
Two-way audio input	1-ch, RCA (2.0 Vp-p, 1kΩ)
Network	
Incoming bandwidth	160Mbps
Outgoing bandwidth	80Mbps
Remote connection	128
Video/Audio Output	
Recording resolution	6MP/5MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Frame rate	Main stream: 50 fps (P) / 60 fps (N) Sub-stream: 50 fps (P) / 60 fps (N)
HDMI/VGA output	1-ch, resolution: 1920 × 1080 /60Hz, 1600 × 1200 /60Hz, 1280 × 1024 /60Hz, 1280 × 720 /60Hz, 1024 × 768 /60Hz
Audio output	1-ch, RCA (Linear, 1kΩ)
Decoding	
Live view / Playback resolution	6MP/5MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Capability	16-ch@4CIF, 12-ch@720P, 6-ch@1080P
Hard Disk	
SATA	2 SATA interfaces for 2 HDDs
Capacity	Up to 6TB for each disk
External Interface	
Network Interface	1 RJ-45 10 /100 /1000 Mbps self-adaptive Ethernet interface
USB Interface	1 × USB 2.0 and 1 × USB 3.0
PoE	
Interface	16 independent 100 Mbps PoE network interfaces
Max. Power	200W
Supported standard	AF and AT
GENERAL	
Power Supply	100~240V AC
Consumption	≤ 15W
Working Temperature	+14 °F~ + 131 °F(-10 °C ~ +55 °C)
Working Humidity	10% - 90%
Casing	19-inch rack-mounted 1U casing
Dimensions (WxDxH)	445 × 290 × 45mm (17.5 ×11.4 × 1.8 inch)
Weight	≤ 1 kg (2.2 lb)