

# 960p IP CAMERA


- Eyeball IR Dome Type
- 3.6mm Fixed Lens
- 12 IR LEDs
- H.264 / MJPEG / Dual CODEC
- UPNP
- DC 12V
- Power over Ethernet (PoE)

H.264 ONVIF

## FEATURES

- 1/3" Line Scanning Digital and Advanced DSP Technology
- Picture Resolution 960P Color CMOS, 1.3 Mega Pixel, 1280×960
- Optimized H.264 Main Profile compression algorithm, high compression ratio and high quality image; convenient to realize a transmission of HD images on a narrow band, thus it can save the storage space; support triple bit streams
- The most advanced network delivery server technology, easily achieve more user access, multi-stage user password rights management
- Built in Web Server, through the IE browser easy to realize the remote control Settings prison see operation
- Support Facilities Remote Security Upgrade Function
- Support DDNS, PPPoE and UPnP, Support LAN, WAN Transport.
- Technology of self adaptability to network that it may adjust its video flame rate automatically according to the bandwidth of network
- Functions of Alarm in Video Missing, Mobile Detection or Probe, etc. (Available to Set the Regions and Sensitivity)
- Support Mobile Detection / Image Shielding / Image Snapshot
- Functions of auto recovery in abnormality and auto reconnection in network breakdown

## DIMENSIONS

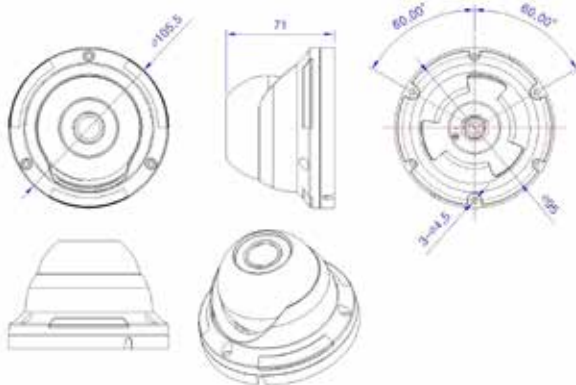

NIB B1322F			
Camera	Pixel	1.3 Mega Pixel / 1280*960	
	Lens	3.6mm	
	Electronic Shutter	1/25s-1/30,000s	
	Low Lux	Color : 0.1Lux@F1.6 B/W:0.01Lux@F1.6	
	Auto Iris	N/A	
	ICR	Support	
	Video Parameter	Saturation, brightness, contrast ratio and color tone can be adjusted by customer end or IE explorer	
IR	IR Properties	Dual Filter Day / Night: Automatic Switch, Linkage Switch	
	IR Light	12pcs 5Ø IR LEDs	
Audio-Video Coding Parameters	Compression	H.264 Main Profile@Level 3.0 / MJPEG optional	
	Video Bit Rate	0.1M-6Mbps, Customized	
	Bit Stream Type	Video Stream	
	Audio Compress	N/A	
	Audio Bit Rate	N/A	
	Triple Bit Streams	Support	
Image	Video Resolution	1280×960	
	Video Flame Rate	PAL: 1-25 frames/second, NTSC: 1-30 frames/second	
Function	PTZ	N/A	
	Heartbeat Mechanism	Support	
	IP Auto Pop-Out	IP Auto Pop-Out at Customer End	
	Password Protection	Multi-Level Protection on Password	
	Intellectual Alarm	Mobile Detection, Video Shielding, Video Loss, Network Breakdown, Abnormality in Storage	
	Basic Functions	One-Key Reset, Password Protection, Watermark Technology	
	Interface	Audio Input	N/A
		Video Output	N/A
Network Port		1 pcs, RJ45 10M/100Mbps Self-Adaptable Ethernet Port	
Serial Port		N/A	
Alarm Input		N/A	
Wireless Network	Alarm Output	N/A	
	WiFi	N/A	
	Wireless Encryption Protocol	N/A	
	Cell Phone Monitor	Support	
Others	3G Network	N/A	
	POE	802.3af	
	Power Supply	DC12V/1.5A	
	Power Consumption	<6W	
	Working Temp	-10°C ~ +55°C / 14°F ~ 131°F	
	Working Humidity	10 ~ 85%	
	Dimension	φ 106mm×65.8mm	