




2 MEGAPIXEL IR EYEBALL CAMERA



FEATURES

- ▶ 1080p (1920 x 1080) Full Real Time Coding
- ▶ Maximum Resolution: 1920 x 1080
- ▶ ICR Auto Switch, True Day & Night
- ▶ 20 ~ 30m IR Night View Distance
- ▶ 3D DNR, Digital WDR
- ▶ Support Corridor Pattern
- ▶ ROI Coding
- ▶ PoE (Power over Ethernet) Power Supply
- ▶ Support Smart Phone, iPad, Remote Monitoring
- ▶ Support P2P / Triple Streams
- ▶ 2.8~12mm Vari-focal Lens
- ▶ H.264 / 30 IR LED
- ▶ Water Proof (IP66)
- ▶ DC 12V / White Casing

DIMENSIONS

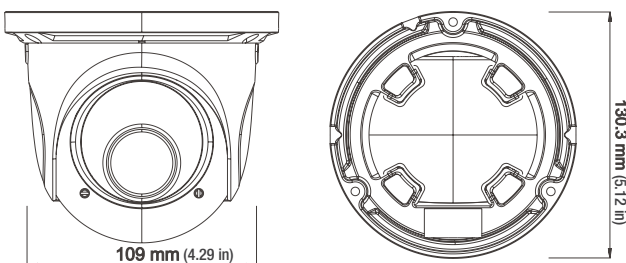

NIB C232FV-W	
CAMERA	
Image Sensor	1 / 3 "CMOS
Image Size	1920x1080
Electronic Shutter	1 / 25 s ~ 1 / 100000 s
Min. Illumination	0 Lux (IR LED ON)
Lens	2.8 ~ 12 mm Vari-focal Lens
Lens Mount	CS Φ14
IMAGE	
Video Compression	H.264 / MJPEG
Resolution	1080P (1920 x 1080), 720P (1280 x 720), D1, CIF, 480 x 240
Multi-stream	1920 x 1080 (1 ~ 30fps) / 1280 x 720 (1 ~ 30fps) / 1280 x 720 (1 ~ 10fps) / D1 (1 ~ 30fps) / CIF (1 ~ 30fps) / CIF (1 ~ 30fps) / 480 x 240 (1 ~ 30fps)
Bit rate	64 Kbps ~ 8 Mbps
Encode Mode	VBR / CBR
Quality	Five levels under VBR; Freely adjustable under CBR
Image Settings	Corridor pattern, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
FUNCTIONS	
Remote Monitoring	IE browsing, CMS remote control
Online Connection	Support simultaneous monitoring for up to 6 users; Support multi-stream real time transmission
Protocol	TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, Protocol SMTP, FTP
Storage	Network remote storage
Smart Alarm	Motion Alarm
Day & Night	ICR
PoE	Yes
IR Distance	20 ~ 30m
Water-proof	IP66
INTERFACES	
Network	RJ45
Audio	No
OTHERS	
Power Supply	DC 12V / PoE
Power Consumption	< 2.5W
IR Consumption ON	< 5W
Operating Environment	- 40 °C ~ 50 °C, 10 % ~ 90 % humidity
Dimensions	Φ109 × 130 mm (Φ4.29 × 5.12 in)
Weight (net)	659 g (1.45 lbs)