

# 960p IP CAMERA



- IR Bullet Type
- 1/3" Aptina CMOS
- 1.3MP (960p)
- 2.8-12mm Fixed Lens
- 42 IR LEDs
- MJPEG / UPNP
- DC 12V
- Mechanical IR-Cut Filter
- Power over Ethernet (PoE)


H.264 ONVIF



## FEATURES

- 1/3" Line Scanning Digital and Advanced DSP Technology
- Picture Resolution 960p Color CMOS, 1.3 Mega Pixel, 1280×960
- Optimized H.264 Main Profile compression algorithm, high compression ratio and high quality image; convenient to realize a transmission of HD images on a narrow band, thus it can save the storage space; support triple bit streams
- The most advanced network delivery server technology, Easily achieve more user access, Multi-stage user password rights management
- Built in Web Server, through the IE browser easy to realize the remote control Settings prison see operation
- Support facilities remote security upgrade function
- Support DDNS, PPPoE and UPnP, Support LAN, WAN transport.
- Technology of self adaptability to network that it may adjust its video flame rate automatically according to the bandwidth of network
- Functions of alarm in video missing, mobile detection, probe, or etc. (Available to set the regions and sensitivity)
- Support Mobile Detection / Image Shielding / Image Snapshot
- Functions of auto recovery in abnormality and auto reconnection in network breakdown

## DIMENSIONS

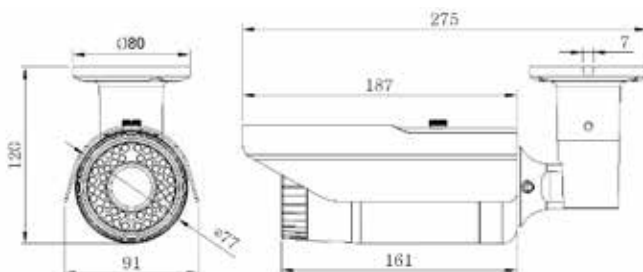

NIR B1332FV		
Camera	Pixel	1.3 Mega Pixel, 1280*960
	Sensor	1/3" 1.3M Aptina CMOS
	Lens	2.8-12mm
	Electronic Shutter	1/25s-1/30,000s
	Low Lux	Color : 0.1Lux@F1.6 B/W:0.01Lux@F1.6
	ICR	Support
IR	IR Properties	Dual Filter Day / Night: Automatic Switch, Linkage Switch
	IR Light	42pcs 5Ø IR LEDs
Audio-Video Coding Parameters	Compression	H.264 Main Profile@Level 3.0 / MJPEG optional
	Video Bit Rate	0.1M-6Mbps, Customized
	Bit Stream Type	Video Stream
	Audio Compress	N/A
	Audio Bit Rate	N/A
Image	Triple Bit Streams	Support
	Video Resolution	1280×960
	Video Flame Rate	PAL: 1-25 frames/second, NTSC: 1-30 frames/second
Function	PTZ	N/A
	Heartbeat Mechanism	Support
	IP Auto Pop-Out	IP auto pop-out at customer end
	Password Protection	Multi-level protection on password
	Intellectual Alarm	Mobile Detection, Video Shielding, Video Loss, Network Breakdown, Abnormality in Storage
	Basic Functions	One-Key Reset, Password Protection, Watermark Technology
	Interface	Audio Input
Wireless Network	Video Output	N/A
	Network Port	1 pcs, RJ45 10M/100Mbps Self-Adaptable Ethernet Port
	Serial Port	N/A
	Alarm Input	N/A
	Alarm Output	N/A
	WIFI	N/A
	Wireless Encryption Protocol	N/A
others	Cell Phone Monitor	Support
	3G Network	N/A
	POE	802.3af
	Power Supply	DC12V/1.5A
	Power Consumption	<6W
	Working Temp	-10° C ~ +55° C / 14° F ~ 131° F
Working Humidity	10 ~ 85%	
Dimension	(W)275mm×(L)91mm×(H)120mm	