



3 MEGAPIXEL IR BULLET CAMERA



H.264



FEATURES

- ▶ 3MP (2048 x 1536) Full Real Time Coding
- ▶ Maximum Resolution: 2048 x 1536
- ▶ ICR Auto Switch, True Day & Night
- ▶ 20 ~ 30m IR Night View Distance
- ▶ Third generation of dot matrix LED IR lights optional, small size, efficient heat dissipation, long lifespan
- ▶ 3D DNR, Digital WDR
- ▶ ROI Coding
- ▶ Support one-way audio and PoE power supply
- ▶ Support Smart Phone, iPad, Remote Monitoring
- ▶ Support P2P
- ▶ 3.6mm Fixed Lens
- ▶ H.264 / 36 IR LED
- ▶ Water Proof (IP66)
- ▶ DC 12V / Black & White Casing

DIMENSIONS

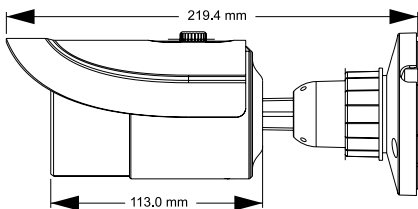

NIR C3032F-BW	
CAMERA	
Image Sensor	1 / 3 "CMOS
Image Size	2048 x 1536
Electronic Shutter	1 / 25 s ~ 1 / 100000 s
Min. Illumination	0 Lux (IR LED ON)
Lens	3.6 mm Fixed Lens
Lens Mount	M12
IMAGE	
Video Compression	H.264 / MJPEG
Resolution	3MP (2048 × 1536), 1080P (1920 × 1080), 720P (1280 × 720), D1, CIF, 480 x 240
Multi-stream	3MP (1 ~ 30fps) / 1920 x 1080 (1 ~ 30fps) / 1280 x 720 (1 ~ 10fps) / D1 (1 ~ 30fps) / CIF (1 ~ 30fps) / CIF (1 ~ 30fps) / 480 x 240 (1 ~ 30fps)
Bit rate	64 Kbps ~ 8 Mbps
Encode Mode	VBR / CBR
Quality	Five levels under VBR; Freely adjustable under CBR
Image Settings	ROI coding, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
FUNCTIONS	
Remote Monitoring	IE browsing, CMS remote control
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission
Protocol	TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, Protocol SMTP, FTP
Storage	Network remote storage
Smart Alarm	Motion Alarm
Day & Night	ICR
PoE	Yes
IR Distance	20 ~ 30m
Water-proof	IP66
INTERFACES	
Network	RJ45
Audio	No
OTHERS	
Power Supply	DC 12V / PoE
Power Consumption	< 4W
IR Consumption ON	< 7W
Operating Environment	- 40 °C ~ 50 °C, 10 % ~ 90 % humidity
Dimensions	Φ 87mm × 219mm (Φ 3.4 in × 8.6 in)
Weight (net)	621 g (1.37 lbs)