


**960p 4Ch**  
**IP PACKAGE**  
**NVR+CAMERAS**



**FEATURES**

- 4 × 960p (1280×960) IP Camera with 30 IR Night Vision
- 4 Channel Network Video Recorder with 4 Port PoE Switch Built-in
- 4 pcs Camera Cable, each 60ft
- Support iPhone/iPad/Android Mobile
- Support ONVIF



\*Accessories

**NPK SR5C0413AE**


| HD IR IP CAMERA     |  |
|---------------------|--|
| Image Sensor        | 1/3" 1.3Megapixel AR CMOS                            |
| Resolution          | Main Stream: 1280×720,Sub Stream: 704×576            |
| Lens                | 6mm  |
| IR Light            | 30pcs IR LEDs  |
| Frame Rate          | PAL:1-25fps, NTSC:1-30fps                            |
| Compression         | H.264 Main Profile@Level 3.0                         |
| Bit Rate            | 0.1M~6Mbps   |
| Electronic shutter  | 1/25~1/100,000s                                      |
| Low Lux             | Color:0.6Lux@F1.2 B/W:0.08Lux@F1.2                   |
| Dual Stream         | Support  |
| Function            | Reset, Password Protection                           |
| Cell phone monitor  | iPhone, iPad, Android                                |
| iMAC                | Support  |
| 3G network          | N/A  |
| POE                 | Support  |
| Power consumption   | ≤3W  |
| Working temp        | -10 °C ~ +55 °C / 14 °F ~ 131 °F                     |
| Working humidity    | 10 ~ 85%   |
| Dimension           | (L)172×(W)74×(H)64mm / (L)6.7×(W)2.9×(H)2.5inch      |
| NVR                 |  |
| IP Camera Input     | 4 ch D1 / 4 ch 720p / 4 ch 1080p                     |
| Audio Input         | Through IP Camera Network Input                      |
| Protocol            | ONVIF 2.2  |
| CVBS                | 1ch, BNC   |
| VGA                 | 1ch, 1440×900,1280×1024,1024×768                     |
| HDMI                | 1ch, 1.3a, 1280×1024,1024×768                        |
| Resolution          | D1, 720p, 1080p                                      |
| Compression         | H.264/MPEG 4 AVC, Main Profile 3.0                   |
| Frame Rate          | 1~30fps/D1,1~30fps/720p,1~30fps/1080p                |
| Bit Stream Type     | CBR / VBR  |
| Video Bit Rate      | D1 Max 2Mbps, 720p Max 4Mbps, 1080p Max 8Mbps        |
| Audio Output        | 1ch,BNC (3.3Vp-p,4.7KΩ)                              |
| Audio Compress      | G.711A, G.711U, G.726, AAC                           |
| Audio Bit Rate      | 16~128Kbps   |
| Dual Stream         | Support IP Camera Main Stream and Sub Stream         |
| Playback            | Max 4 CH (4 CHD1 / 2 CH 720p / 1 CH 1080p)           |
| Motion Detection    | Need IP Camera support ONVIF Motion Detection        |
| Hard Disk           | 1 SATA port  |
| Network port        | 1 pcs, RJ45 10M/100Mbps self-adaptable Ethernet port |
| USB Interface       | 2 USB 2.0 ports                                      |
| RS-485              | Standard 485, half duplex,PTZ control                |
| Dimension(W×D×H)    | 255×230×42(mm) / 10×9×1.6(inch)                      |
| POE                 | 4 port PoE   |
| Installation        | Desk type  |
| Power Supply        | 220V±10% 50Hz  |
| Working Environment | -10 ~ +55 °C / 10~90%RH / 86~106kpa                  |

\* HDD NOT INCLUDED


## DIMENSIONS



\*Camera Interface

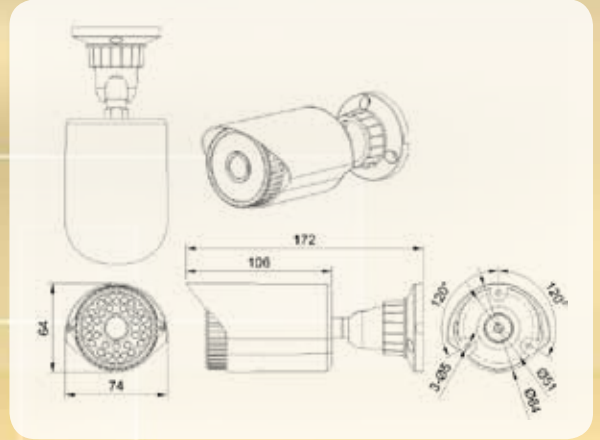

## DIMENSIONS

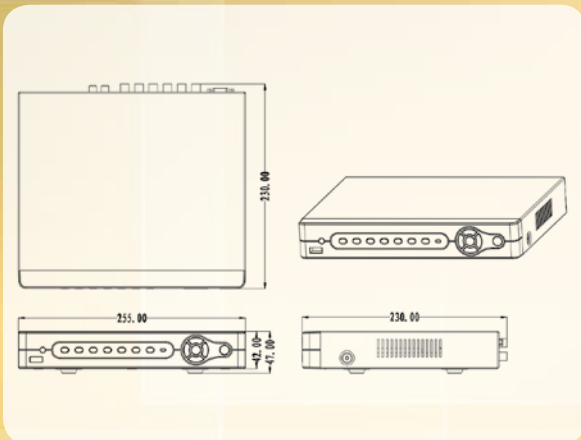

\*Back Panel

\* HDD NOT INCLUDED