

32CH STI SERIES



STI Series DVR accepts ANALOG / 960H / HD-TVI / IP CAMERA




REAR PANEL

- REAL-TIME Live / 1/16fps to REAL-TIME Frame Rate
- H.264 / Dual Streaming
- RS-485 for PTZ control
- Free DDNS Support / EZVIZ Cloud P2P
- Manufactured by Hikvision

FEATURES

- Connectable to HD-TVI and analog cameras
- Connectable to the Coaxitron camera with long transmission distance
- Connectable to network cameras
- Simultaneous HDMI and VGA outputs at up to 1920×1080P resolution
- New GUI and support starting record with one key
- Redundant recording and holiday recording
- Instant playback for assigned camera during multi-channel live view mode
- Support up to 32-ch synchronous playback at 1080P resolution; and reverse playback for multi-camera
- Smart playback to go through less effective information
- Manual video quality diagnostics
- Support VCA alarm (line crossing detection and intrusion detection)
- Customization of tags, searching & playing back by tags
- Locking and unlocking record files
- Support HDD quota and group management; different capacity can be assigned to different cameras under quota mode
- Provide 4 SATA interfaces and 1eSATA interface for recording & backup
- 1 self-adaptive 10M/100M/1000M network interface
- Support access by EZVIZ Cloud P2P
- Support Hikvision DDNS (Dynamic Domain Name System)
- Network detection function.

TVST STI732	
VIDEO/AUDIO INPUT	
Video Compression	H.264
Analog & HD-TVI Video Input	32Ch
Supported Camera Types	720P25, 720P30, 720P50, 720P60, 1080P25, 1080P30, CVBS
IP Video Input	8-ch (up to 32-ch) Up to 2MP Resolution
Audio Compression	G.711u
Audio Input	1-ch, RCA (2.0 Vp-p, 1 KΩ)
Two-way Audio In	1-ch, RCA (2.0 Vp-p, 1 KΩ)
VIDEO/AUDIO OUTPUT	
HDMI/VGA Output	1920 × 1080 / 60 Hz, 1280 × 1024 / 60 Hz, 1280 × 720 / 60 Hz, 1024 × 768 / 60 Hz
Encoding Resolution	Main stream: 1080P(non-real-time) / 720P / VGA / WD1 / 4CIF / CIF / Sub-stream: WD1(non-real-time) / 4CIF(non-real-time) / CIF / QCIF / QVGA
Frame Rate	Main stream: 1/16 fps ~ Real time frame rate Sub-stream: 1/16 fps ~ Real time frame rate
Video Bitrate	32 Kbps-6 Mbps
Audio Output	1-ch, RCA (Linear, 1KΩ)
Audio Bitrate	64 Kbps
Dual Stream	Support
Stream Type	Video, Video & Audio
Synchronous Playback	32Ch
Playback Resolution	1080P / 720P / VGA / WD1 / 4CIF / CIF / QVGA / QCIF
NETWORK MANAGEMENT	
Remote Connections	128
Network Protocols	TCP/IP, PPPoE, DHCP, DNS, DDNS, NTP, SADP, SMTP, SNMP, NFS, iSCSI, UPnP™, HTTPS
HARD DISK	
SATA	4 SATA interfaces for 4 HDDs; 1 eSATA interface
Capacity	Up to 4TB capacity for each disk
EXTERNAL INTERFACE	
Network Interface	1; 10M / 100M / 1000M self-adaptive Ethernet interface
Serial Interface	RS-232, RS-485, Keyboard
USB Port	3 x USB 2.0
Alarm in/out	16 / 4
GENERAL	
Power Supply	100 ~ 240VAC, 47 ~ 63HZ
Consumption (w/o hard disks)	≤ 65W
Working Temperature	-10 °C ~ +55 °C (14 °F ~ 131 °F)
Working Humidity	10%~90%
Chassis	19-inch rack-mounted 1.5U chassis
Dimensions (W x D x H)	445 × 390 × 70mm (17.5 × 15.3 × 2.7 inch)

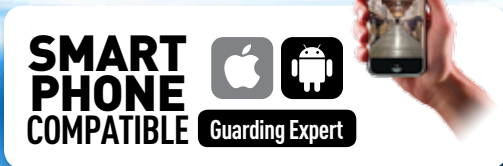

HDD INSTALLATION AVAILABLE UPON REQUEST
IR REMOTE & MOUSE INCLUDED

Specifications may change without a prior notice. All the images on the page are for illustrative purpose only. They may not representing actual products. All the rights for the registered trademarks are reserved for their respectable owners. Not responsible for any typographical errors.