


# UN-IPC2122SR3PF40B

## 2MP Mini Fixed Bullet Network Camera


### Specifications

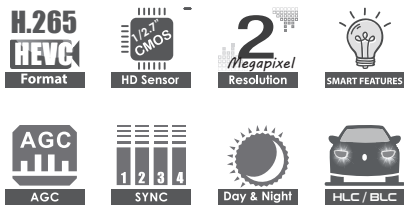

### Key Features

- H.265 Compression
- 1/2.7" 2MP CMOS Sensor
- Effective Pixels: 1920(H)×1080(V)
- Smart IR, IR anti-reflection window
- IR Distance is up to 98ft (30M)
- 0.02 lux @F1.8, AGC ON; 0Lux
- 2MP@30fps
- DWDR, 2D/3D DNR
- 4.0mm Fixed Lens
- DC 12V/PoE
- IP66

### Dimensions

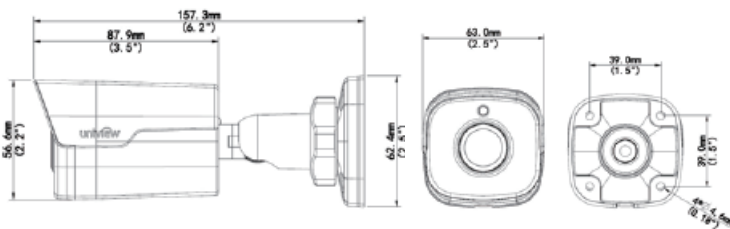

| Model                      | IPC2122SR3-PF40-B   |
|----------------------------|---|
| Camera                     |   |
| Sensor                     | 1/2.7", 2.0 megapixel, progressive scan, CMOS   |
| Lens                       | 4.0mm@F1.8  |
| Angle of View              | 80.8°   |
| Shutter                    | Auto/Manual, 1/6~1/100000 s   |
| Min. Illumination          | Colour: 0.02 Lux (F1.8, AGC ON)<br>0 Lux with IR on   |
| IR Range                   | Up to 30m (98 ft) IR range  |
| Day/Night                  | IR-cut filter with auto switch (ICR)  |
| S/N                        | >52dB   |
| WDR                        | Digital WDR   |
| Noise Reduction            | 2D/3D   |
| Video                      |   |
| Max. Resolution            | 1920 × 1080   |
| Video Compression          | H.265, H.264, MJPEG   |
| Frame Rate                 | 1080P (1920*1080): Max. 30 fps; 720P (1280*720): Max. 30 fps;<br>D1 (720*576): Max. 30 fps                                |
| Video Streaming            | Triple  |
| 9:16 Corridor Mode         | Supported   |
| ROI                        | Supported   |
| HLC                        | Supported   |
| Evaluative Metering        | Supported   |
| OSD                        | Up to 8 OSDs  |
| Motion Detection           | Up to 2 areas   |
| Privacy Mask               | Up to 8 areas   |
| Smart                      |   |
| Behavior Detection         | Intrusion, crossing line, motion detection  |
| Intelligent Identification | Face detection, Defocus, Scene Change   |
| Statistical Analysis       | People counting   |
| Network                    |   |
| Protocols                  | L2TP, IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x |
| Compatible Integration     | ONVIF, API  |
| Interface                  |   |
| Network                    | 1 RJ45 10M/100M Base-TX Ethernet  |
| General                    |   |
| Power                      | 12 V DC, or PoE (IEEE802.3 af)<br>Power consumption: Max 6.4 W  |
| Dimensions (L × W × H)     | 157.3 × 62.4 × 63 mm (6.2" × 2.5" × 2.5")   |
| Weight                     | 0.45 kg (0.99 lb)   |
| Working Environment        | -35°C ~ +60°C (-31°F ~ 140°F),<br>Humidity ≤ 95% RH(non-condensing)   |
| Ingress Protection         | IP67  |

Design and specifications are subject to change without notice.

www.EasternCCTV.com

#### Headquarters

50 Commercial St.,  
Plainview, NY 11803

TEL: 516-870-3779 FAX: 516-390-1200

#### Queens, NY

129-04 14th Ave.,  
College Point, NY 11356

TEL: 718-939-2710 FAX: 718-939-2713

#### E. Los Angeles, CA

110 California Ave.,  
City of Industry, CA, 91744

TEL: 626-961-8810 FAX: 626-961-8809

#### N. Hollywood, CA

13761 Saticoy St.  
Panorama City, CA 91402

TEL: 818-924-9021 FAX: 818-849-5127

#### Miami, FL

4515 NW 72nd Ave.  
Miami, FL 33166

TEL: 305-423-1329 FAX: 786-717-7282

#### Houston, TX

3790 Westchase Dr.,  
Houston, TX 77042

TEL: 832-308-5282 FAX: 832-925-7454