


UN-IPC252ERA-X22DUG

2MP 22X Starlight IR Bullet Network Camera



Specifications


Model	UN-IPC252ERA-X22DUP
Camera	
Sensor	1/1.9", progressive scan , 2.0 megapixel, CMOS
Lens	6.5 ~ 143 mm(22 x optical zoom), AF automatic focusing and motorized zoom lens
Angle of view(H)	59°(wide) ~ 3°(tele)
Shutter	Auto/Manual, 1/6~1/100000 s
Min. Illumination	Colour: 0.001 Lux (F1.5, AGC ON), 0 Lux with IR
Iris	Auto/Manual, F1.5~F3.4, DC-Iris
Day / Night	IR-cut filter with auto switch (ICR)
Digital Noise Reduction	2D/3D DNR
S/N	>52 dB
IR Range	up to 200 m (656 ft) IR range
WDR	120dB
Defog	Digital Defog
Video	
Video Compression	Ultra 265, H.265, H.264, MJPEG
Frame Rate	Main Stream:2MP (1920×1080):Max. 60 fps; Sub Stream:2MP (1920×1080):Max. 60 fps; Third Stream: D1 (720×576): Max. 60 fps
9:16 Corridor Mode	Supported
ROI	Supported
BLC & HLC	Supported
OSD	Up to 8 OSDs
Motion Detection	Up to 4 areas
Privacy Mask	Up to 8 areas
Smart	
Behavior Detection	Intrusion, cross line, motion detection
Exception Detection	Audio detection
Intelligent Identification	Face detection, Defocus, Scene Change
Statistical Analysis	People counting
General Function	Watermark, IP Address Filtering, Tampering Alarm, Alarm input, Alarm output, Access Policy, ARP Protection, RTSP Authentication, User Authentication
Audio	
Audio Compression	G.711
2 way audio & Suppression	Supported
Sampling Rate	8 KHZ
Storage	
Edge Storage	Micro SD, up to 128 GB
Network Storage	ANR
Network	
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTPC, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP
Compatible Integration	ONVIF(Profile S, Profile G), API
Interface	
Audio I/O	Audio cable; 1 Input: impedance 35 kΩ; amplitude 2 V [p-p] 1 Output: impedance 600 Ω; amplitude 2 V [p-p]
Alarm I/O	2 / 1
Serial Port	1 RS485
Network	1 RJ45 10M/100M Base-TX Ethernet
Video Output	1 BNC, impedance 75 Ω; amplitude 1 V [p-p]
General	
Power	24 V AC ±25%, -P: PoE(IEEE 802.3at), consumption: Max 21W
Dimensions (L×W×H)	396.5 × 137 × 112mm (15.6" × 5.4" × 4.4")
Weight	3.7 kg (8.2 lb)
Working Environment	-40°C ~ +60°C (-40°F ~ 140°F), Humidity ≤ 95% RH(non-condensing)
Ingress Protection	IP67

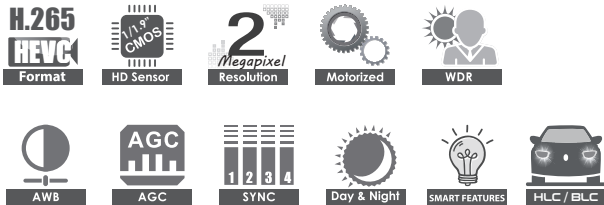

Key Features

- 1/1.9" HD CMOS Sensor
- Up to 1920 × 1080 resolution, 60fps
- 22X Optical Zoom
- 6.5~143mm Motorized Lens
- BLC & HLC, ROI, Motion Detection
- Smart Features: Intrusion, cross line, scene change, people counting, etc.
- WDR, Smart IR, Distance: 200m
- Alarm I/O, Audio I/O, ONVIF
- AC24V/PoE
- IP67

Dimensions

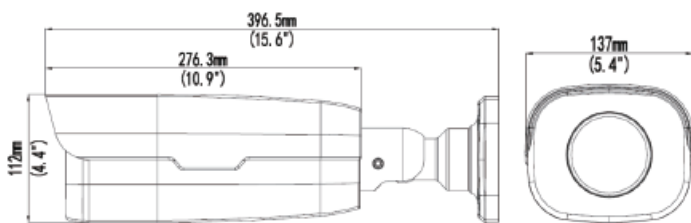

Design and specifications are subject to change without notice.

www.EasternCCTV.com

Headquarters

50 Commercial St.,
Plainview, NY 11803

TEL: 516-870-3779 FAX: 516-390-1200

Queens, NY

129-04 14th Ave.,
College Point, NY 11356

TEL: 718-938-2710 FAX: 718-938-2713

E. Los Angeles, CA

110 California Ave.,
City of Industry, CA 91744

TEL: 626-961-8810 FAX: 626-961-8809

Los Angeles, CA

1113 Venice Blvd,
Los Angeles, CA 90015

TEL: 213-218-2260 FAX: 213-218-2261

N. Hollywood, CA

13761 Satcoy St.
Panorama City, CA 91402

TEL: 818-924-9021 FAX: 818-849-5127

Miami, FL

4515 NW 72nd Ave.
Miami, FL 33166

TEL: 305-423-1329 FAX: 786-717-7282

Houston, TX

3790 Westchase Dr.,
Houston, TX 77042

TEL: 832-308-5282 FAX: 832-925-7454