


# UN-IPC324ER3DVPF28 (36)

## 4MP WDR Vandal Fixed Dome Network Camera


### Specifications

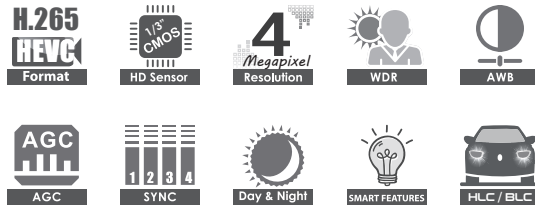

### Key Features

- 1/3" progressive scan CMOS
- 2560 x 1440 resolution, 25fps
- 2.8mm/3.6mm fixed lens
- Smart IR, up to 30m IR distance
- H.265, 3D DNR, ROI, 9:16 corridor mode, ONVIF
- DC12V, PoE. Wide voltage range of  $\pm 25\%$
- IP67, IK10

### Dimensions

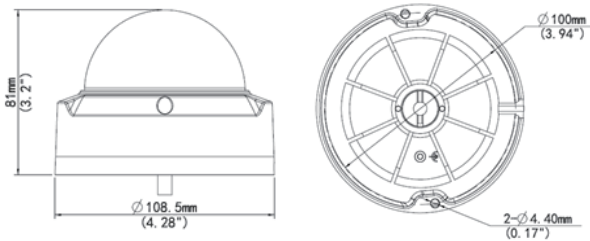

Model	UN-IPC324ER3DVPF28	UN-IPC324ER3DVPF36
<b>Camera</b>		
Sensor	1/3", 4 megapixel, progressive scan CMOS	
Lens	2.8 mm@F2.0	3.6 mm@F2.0
Angle of View (H)	101.8°	76.8°
Shutter	Auto/Manual, 1/6~1/100000 s	
Min. Illumination	Colour: 0.02 Lux (F2.0, AGC ON) 0 Lux with IR	
Day/Night	IR-cut filter with auto switch (ICR)	
S/N	> 55 dB	
WDR	120 dB	
<b>Video</b>		
Max. Resolution	2592 × 1520	
Video Compression	H.265, H.264, MJPEG	
Frame Rate	4MP (2592x1520): Max. 20 fps; 4MP (2560x1440): Max. 25 fps 3MP (2048x1520): Max. 30 fps; 1080P (1920x1080): Max. 30 fps	
Video Streaming	Triple	
9:16 Corridor Mode	Supported	
ROI	Supported	
Evaluative Metering	Supported	
OSD	Up to 8 OSDs	
Privacy Mask	Up to 8 areas	
<b>Smart</b>		
Behavior Detection	Intrusion, crossing line, motion detection	
Exception Detection	Audio detection	
Intelligent Identification	Face detection, Defocus, Scene Change	
Statistical Analysis	People counting	
<b>Audio</b>		
Audio Compression	G.711	
Two-way audio	Supported	
<b>Storage</b>		
Edge Storage	Micro SD, up to 128 GB	
<b>Network</b>		
Protocols	L2TP, IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SIP, 802.1x	
Compatible Integration	ONVIF, API	
<b>Interface</b>		
Audio I/O	Input: impedance 35 k $\Omega$ ; amplitude 2 V [p-p] Output: impedance 600 $\Omega$ ; amplitude 2 V [p-p]	
Alarm I/O	1 / 1CH	
Network	10M/100M Base-TX Ethernet	
<b>General</b>		
Power	12 V DC, or PoE (IEEE802.3 af) Power consumption: Max 5.5W	
Dimensions (Ø x H)	Ø4.28" x 3.2" (Ø108.5 x 81 mm)	
Weight	0.99 lb (0.45 kg)	
Working Environment	-35°C ~ +60°C (-31°F ~ 140°F), Humidity $\leq 95\%$ RH(non-condensing)	
Ingress Protection	IP67	
Vandal Resistant	IK10	

Design and specifications are subject to change without notice.

www.EasternCCTV.com

#### Headquarters

50 Commercial St.,  
Plainview, NY 11803

TEL: 516-870-3779 FAX: 516-390-1200

#### Queens, NY

129-04 14th Ave.,  
College Point, NY 11356

TEL: 718-939-2710 FAX: 718-939-2713

#### E. Los Angeles, CA

110 California Ave.,  
City of Industry, CA, 91744

TEL: 626-961-8810 FAX: 626-961-8809

#### N. Hollywood, CA

13761 Saticoy St.  
Panorama City, CA 91402

TEL: 818-924-9021 FAX: 818-849-5127

#### Miami, FL

4515 NW 72nd Ave.  
Miami, FL 33166

TEL: 305-423-1329 FAX: 786-717-7282

#### Houston, TX

3790 Westchase Dr.,  
Houston, TX 77042

TEL: 832-308-5282 FAX: 832-925-7454