


# UN-IPC562EDUG

## 2MP WDR Starlight Network Box Camera


### Specifications

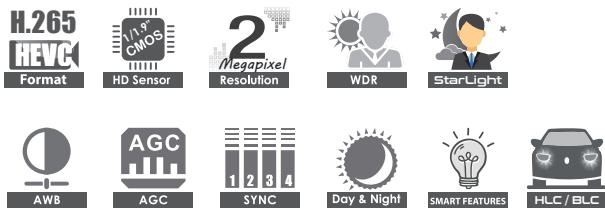

### Key Features

- 1/1.9" progressive scan CMOS
- Up to 1920 × 1080 resolution, 60fps
- 120dB True WDR
- ABF
- Optical fiber interface
- HLC, 3D DNR, ROI, Corridor Mode, ONVIF
- Motor Zoom/focus ports
- AC24V, DC12V, PoE. Wide voltage range of ±25%

### Dimensions

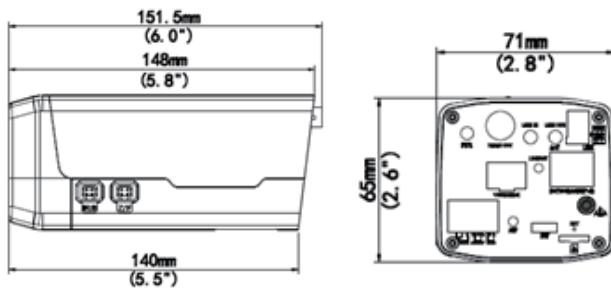

Camera	UN-IPC562EDUG
Sensor	1/1.9" CMOS, progressive scan
Day & Night	Automatically removable IR-cut filter(ICR)
Shutter	Auto/Manual, 1/6~1/100000 s
Min. Illumination	Colour: 0.002 Lux (F1.2, AGC ON), B/W:0.0002 Lux(F1.2, AGC ON)
S/N	>52dB
WDR	120dB
DC-Iris	DC 4V (4-Pin)
Motor Zoom/focus	DC 5V (4-Pin)
<b>Video</b>	
Max. Resolution	1920 × 1080
Video Compression	H.265, H.264, MJPEG
Frame Rate	Main Stream:2MP (1920×1080): Max. 60 fps Sub Stream:2MP (1920×1080): Max. 60 fps; Third Stream:D1 (720×576): Max. 60 fps
9:16 Corridor Mode	Supported
ROI	Supported
HLC	Supported
Evaluative Metering	Supported
ABF	Supported
Defog	Optical Defog & Digital Defog
Video Streaming	Triple
OSD	Up to 8 OSDs
Privacy Mask	Up to 4 areas
<b>Behavior Detection</b>	
Behavior Detection	Intrusion, crossing line, motion detection
<b>Exception Detection</b>	
Exception Detection	Audio detection
<b>Intelligent Identification</b>	
Intelligent Identification	Face detection
<b>Statistical Analysis</b>	
Statistical Analysis	People counting
<b>Audio</b>	
Audio Compression	G.711
Two-way Talking	Supported
<b>Storage</b>	
Edge Storage	Micro SD, up to 128 GB
<b>Network</b>	
Protocols	L2TP, IPv4, IGMP,ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x
Compatible	ONVIF, API
<b>Interface</b>	
Audio I/O	3.5 mm audio interface In: impedance 35 kΩ; amplitude 2 V [p-p] / Out: impedance 600 Ω; amplitude 2 V [p-p]
Alarm I/O	2CH / 1CH
Serial Port	1 RS485 (support Pelco-D/P)
Network	100M/1000M Base-FX SFP + 100M/1000M Base-TX Ethernet
Video Output	1 BNC, impedance 75 Ω; amplitude 1 V [p-p]
<b>General</b>	
Power	24 V AC, 12 V DC, or PoE (IEEE802.3 af), Power consumption: 4.8W (6.8W with ICR on)
Dimensions (L x W x H)	151.5 × 71 × 65 mm (6.0" × 2.8" × 2.6") (excluding the lens)
Weight	0.48 kg (1.1 lb)
Working Environment	-20°C ~ 60°C (-4°F ~ 140°F), Humidity ≤ 95% RH(non-condensing)

Design and specifications are subject to change without notice.

www.EasternCCTV.com

#### Headquarters

50 Commercial St.,  
Plainview, NY 11803

TEL: 516-870-3779 FAX: 516-390-1200

#### Queens, NY

129-04 14th Ave.,  
College Point, NY 11356

TEL: 718-939-2710 FAX: 718-939-2713

#### E. Los Angeles, CA

110 California Ave.,  
City of Industry, CA, 91744

TEL: 626-961-8810 FAX: 626-961-8809

#### N. Hollywood, CA

13761 Saticoy St.  
Panorama City, CA 91402

TEL: 818-924-9021 FAX: 818-849-5127

#### Miami, FL

4515 NW 72nd Ave.  
Miami, FL 33166

TEL: 305-423-1329 FAX: 786-717-7282

#### Houston, TX

3790 Westchase Dr.,  
Houston, TX 77042

TEL: 832-308-5282 FAX: 832-925-7454