


UN-IPC6222ERX20PB / UN-IPC6222ERX30PB


2MP IR Network PTZ Camera

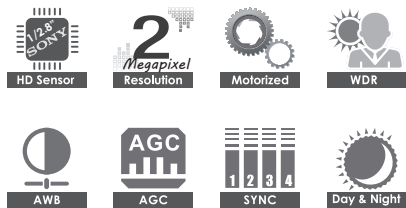

Key Features

- 1/3" HD CMOS Sensor
- Up to 1920 × 1080 resolution, 30fps
- 20X / 30X Optical Zoom
- DWDR, Smart IR, Distance: 150m
- Alarm I/O, Audio I/O, ONVIF
- AC24V, DC24V, PoE (PSE Required)
- IP66

Dimensions

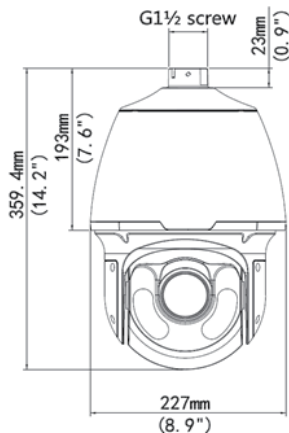

Specifications

Model	UN-IPC6222ER-X20P-B	UN-IPC6222ER-X30P-B
Camera		
Sensor	1/3", 2megapixel, progressive scan, CMOS	
Lens	5.2 ~ 104 mm (20x optical zoom)	4.5 ~ 135 mm (30x optical zoom)
Angle of View (H)	61.9° (wide) ~ 3.5° (tele)	62.9° (wide) ~ 2.3° (tele)
Shutter	Auto/Manual; shutter time: 1/6 s ~ 1/100000 s	
Minimum Illumination	Colour: 0.03 lux (F1.5, AGC ON), 0 lux with IR	
Iris	Auto/Manual; F1.5 ~ F3.0	Auto/Manual; F1.6 ~ F4.4
Day/Night	IR-cut filter with auto switch (ICR)	
S/N	>52dB	
WDR	Digital WDR	
Video		
Max. Resolution	1920 × 1080	
Video Compression	H.265, H.264, MJPEG	
Frame Rate	1080P (1920×1080):Max.30 fps; 720P (1280×720):Max.30 fps; D1 (720×576):Max.30 fps	
Video Streaming	Triple	
HLC	Supported	
Evaluative Metering	Supported	
OSD	Up to 8 OSDs	
Privacy Mask	Up to 8 areas	
Digital Zoom	Supported	
Smart		
Behavior Detection	Intrusion, crossing line, motion detection	
Exception Detection	Audio detection	
Intelligent Identification	Face detection	
Statistical Analysis	People counting	
Audio		
Audio Compression	G.711	
Two-way audio	Supported	
Storage		
Edge Storage	Micro SD, up to 128 GB	
Network		
Protocols	L2TP, IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP 802.1x	
Compatible Integration	ONVIF, API	
Pan & Tilt		
Pan Range	360° (endless)	
Pan Speed	0.1°/s ~ 240°/s, Preset speed: 300°/s	
Tilt Range	-15° ~ +90° (auto reverse)	
Tilt Speed	0.1° ~ 160°/s, Preset speed: 240°/s	
Number of Presets	256	
Patrol	Up to 16 patrols, up to 32 presets per patrol. Note: The total number of patrols and patterns is 16.	
Pattern	Up to 16 patterns, with the total recording time not less 15 minutes per pattern	
Interface		
Audio I/O	Audio cable Input: impedance 35 kΩ; amplitude 2 V [p-p], Output: impedance 600 Ω; amplitude 2 V [p-p]	
Alarm I/O	1/1CH	
Network	10M/100M Base-TX Ethernet	
General		
Power	24 V AC, 24 V DC, PoE (PSE Required), Power consumption: 9 ~ 42W	
Dimensions(ØxH)	Ø227x359.4 mm (Ø8.9" x 14.2")	
Weight	5.28 kg (11.6lb)	
Working Environment	-40°C ~ +65°C (-40°F ~ 149°F), Humidity ≤ 95% RH(non-condensing)	
Ingress Protection	IP66	

Design and specifications are subject to change without notice.

www.EasternCCTV.com

Headquarters

50 Commercial St.,
Plainview, NY 11803

TEL: 516-870-3779 FAX: 516-390-1200

Queens, NY

129-04 14th Ave.,
College Point, NY 11356

TEL: 718-939-2710 FAX: 718-939-2713

E. Los Angeles, CA

110 California Ave.,
City of Industry, CA, 91744

TEL: 626-961-8810 FAX: 626-961-8809

N. Hollywood, CA

13761 Saticoy St.
Panorama City, CA 91402

TEL: 818-924-9021 FAX: 818-849-5127

Miami, FL

4515 NW 72nd Ave.
Miami, FL 33166

TEL: 305-423-1329 FAX: 786-717-7282

Houston, TX

3790 Westchase Dr.,
Houston, TX 77042

TEL: 832-308-5282 FAX: 832-925-7454