

UN-NVR30104P4/08P8/16P8


H.265 1 HDDs 4K NVR | 4CH 4PoE / 8CH 8PoE / 16CH 8PoE



Main Feature:

- 4/8/16-channel input
- Plug & Play with 4/8 independent PoE network interfaces
- Third-party IP cameras supported with ONVIF conformance
- Support 1-ch HDMI, 1-ch VGA, HDMI at up to 4K(3840x2160) resolution
- Up to 8 Megapixels resolution recording
- Support H.265/H.264 video formats
- Accurate retrieval, instant playback
- 1 SATA HDD up to 8 TB
- Support for P2P, UPnP, NTP, DHCP, PPPoE
- Support for mobile client access

Physical Interfaces:

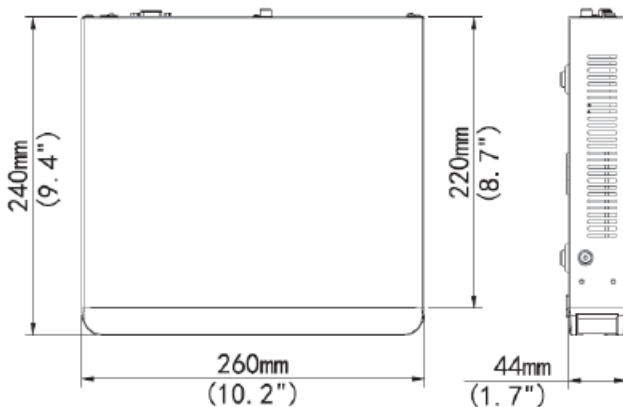

Specification:

Model	UN-NVR30104P4	UN-NVR30108P8	UN-NVR30116P8
Video/Audio Input			
IP Video Input	4CH	8CH	16CH
2-way Audio Input	1CH, RCA		
Network			
Incoming Bandwidth	40Mbps	60Mbps	60Mbps
Outgoing Bandwidth	64Mbps	64Mbps	80Mbps
Remote Users	128		
Video/Audio Output			
HDMI/VGA Output	HDMI: 4K (3840x2160) /30Hz, 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz VGA: 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz		
Recording Resolution	8MP / 6MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P / D1 / 2CIF / CIF		
Audio Output	1CH, RCA		
Synchronous Playback	4CH	8CH	16CH
Decoding			
Compression	H.265/H.264		
Live view /Playback	8MP / 6MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P / D1 / 2CIF / CIF		
Capability	1 x 4K@30, 2 x 4MP@30, 4 x 1080p@30, 8 x 720p@30, 16 x D1		
Hard Disk			
SATA	1 SATA interface		
Capacity	up to 8TB for each disk		
External Interface			
Network Interface	1 RJ-45 10M/100M self-adaptive Ethernet Interface		
USB Interface	Rear panel : 2 x USB2.0, Front panel : 1 x USB2.0		
Alarm In / Out	4CH / 1CH		
PoE			
Interface	4 independent 100 Mbps PoE network interfaces	8 independent 100 Mbps PoE network interfaces	
Max Power	30W for single port 54W in total (13.5W for each)	30W for single port 108W in total (13.5W for each)	
Supported Standard	IEEE 802.3at, IEEE 802.3af		
General			
Power Supply	48V DC	52V DC	
Consumption	≤ 5 W (without HDD)		
Working Temperature	-10°C ~ +55°C (+14°F ~ +131°F)		
Working Humidity	10% ~ 90%		
Dimensions	44 x 260 x 240mm (1.7" x 10.2" x 9.4")		
Weight	≤ 1.12 Kg (2.47 lb) (without HDD)		

Design and specifications are subject to change without notice.

www.EasternCCTV.com

Headquarters

50 Commercial St.,
Plainview, NY 11803

TEL: 516-870-3779 FAX: 516-390-1200

Queens, NY

129-04 14th Ave.,
College Point, NY 11356

TEL: 718-939-2710 FAX: 718-939-2713

E. Los Angeles, CA

110 California Ave.,
City of Industry, CA 91744

TEL: 626-961-8810 FAX: 626-961-8809

N. Hollywood, CA

13761 Saticoy St.
Panorama City, CA 91402

TEL: 818-924-9021 FAX: 818-849-5127

Miami, FL

4515 NW 72nd Ave.
Miami, FL 33166

TEL: 305-423-1329 FAX: 786-717-7282

Houston, TX

3790 Westchase Dr.,
Houston, TX 77042

TEL: 832-308-5282 FAX: 832-925-7454