

# UN-NVR30432EP


H.265 4 HDDs 4K NVR | 32CH




### Main Feature:

- Support Ultra 265/H.265/H.264 video formats
- 16/32-channel input
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile C, Profile Q, Profile A, Profile T
- Support 2-ch HDMI, 1-ch VGA, HDMI2 at up to 4K(3840x2160) resolution
- HDMI1/VGA and HDMI2 independent outputs provided
- Up to 12 Megapixels resolution recording
- 4 SATA HDDs, Up to 8TB for each HDD
- Plug & Play with up to 16 independent PoE network interfaces
- Support for 12V Power output
- ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade

### Physical Interfaces:

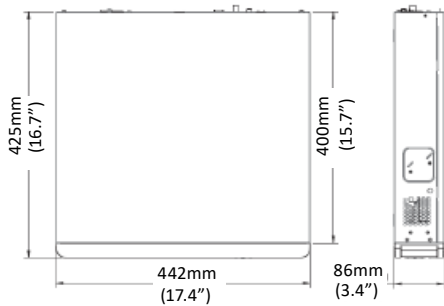

### Rear Panel:

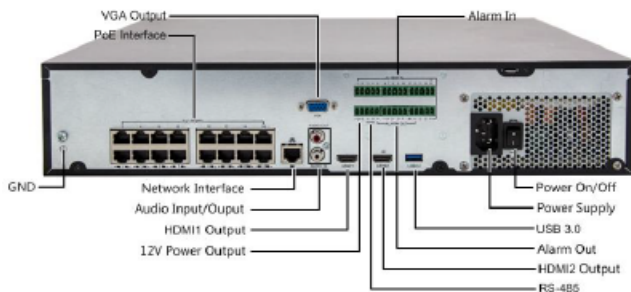

### Specification:

Model	UN-NVR30432EP
<b>Video/Audio Input</b>	
IP Video Input	32CH
Two-way Audio Input	1CH, RCA
<b>Network</b>	
Incoming Bandwidth	320Mbps
Outgoing Bandwidth	320Mbps
Remote Users	128
Protocols	P2P, UPnP, NTP, DHCP, PPPoE
<b>Video/Audio Output</b>	
HDMI/VGA output	<b>HDMI1 / VGA:</b> 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz <b>HDMI2:</b> 4K (3840x2160) /60Hz, 4K (3840x2160) /30Hz, 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz
Recording Resolution	12MP / 8MP / 6MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P / D1 / 2CIF / CIF
Audio Output	1CH, RCA
Synchronous Playback	16CH
Corridor Mode Screen	3/4/5/7/9/10/12/16/32
<b>Decoding</b>	
Decoding format	Ultra 265, H.265, H.264
Live view/Playback	12MP / 8MP / 6MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P / D1 / 2CIF / CIF
Capability	3 x 12MP@25, 4 x 4K@30, 8 x 4MP@30, 16 x 1080p@30, 32 x 960p@25
<b>Hard Disk</b>	
SATA	4 SATA interfaces
Capacity	up to 8TB for each HDD
<b>Smart</b>	
VCA Detection	Face detection, Intrusion detection, Cross line detection, Audio detection, Defocus detection, Scene change detection, Auto tracking
VCA Search	Face search, Behavior search
Statistical Analysis	People counting
<b>External Interface</b>	
Network Interface	1 RJ-45 10M/100M/1000M self-adaptive Ethernet Interface
Serial Interface	1 x RS485
USB Interface	Front panel: 2 x USB2.0 Rear panel: 1 x USB3.0
Alarm In / Out	16CH / 4CH
Power Output	12 VDC
<b>PoE</b>	
Interface	16 independent 100 Mbps PoE network interfaces
Max Power	Max 30W for single port Max 200W in total ( 12.5W for each )
Supported Standard	IEEE 802.3at
<b>General</b>	
Power Supply	100 ~ 240 VAC Power Consumption: ≤ 20 W( without HDD )
Working Environment	-10°C ~ +55°C ( +14°F ~ +131°F ), Humidity ≤ 90% RH(non-condensing)
Dimensions(WxDxH)	442mm x 425mm x 86mm ( 17.4" x 16.7" x 3.4" )
Weight	≤ 5.24 Kg ( 11.55 lb ) ( without HDD )

Design and specifications are subject to change without notice.

www.EasternCCTV.com

### Headquarters

50 Commercial St.,  
Plainview, NY 11803

TEL: 516-870-3779 FAX: 516-390-1200

### Queens, NY

129-04 14th Ave.,  
College Point, NY 11356

TEL: 718-939-2710 FAX: 718-939-2713

### E. Los Angeles, CA

110 California Ave.,  
City of Industry, CA 91744

TEL: 626-961-8810 FAX: 626-961-8809

### N. Hollywood, CA

13761 Saticoy St.  
Panorama City, CA 91402

TEL: 818-924-9021 FAX: 818-849-5127

### Miami, FL

4515 NW 72nd Ave.  
Miami, FL 33166

TEL: 305-423-1329 FAX: 786-717-7282

### Houston, TX

3790 Westchase Dr.,  
Houston, TX 77042

TEL: 832-308-5282 FAX: 832-925-7454