

UN-NVR308-16E/32E/64E


H.265 8 HDDs 4K NVR | 16CH / 32CH / 64CH



Main Feature:

- 16/32/64CH input
- Third-party IP cameras supported with ONVIF conformance
- Support 2-ch HDMI, 1-ch VGA, 1-ch CVBS, HDMI2 at up to 4K(3840x2160) resolution
- Up to 12 Megapixels resolution recording
- Support H.265/H.264 video formats
- Accurate retrieval, instant playback
- Support HDD hot swap with RAID 0, 1, 5, 6, 10 storage scheme configurable
- 8 SATA HDDs, Up to 8TB for each HDD
- Support various VCA detection alarm and VCA search
- Support N+1 Hot spare
- Support for 12V Power output
- Support for P2P, UPnP, NTP, DHCP, PPPoE
- Support for mobile client access
- Cloud Update, can be easily updated through Cloud (local or remote site), keep device updated, save labor cost and human error-free

Physical Interfaces:

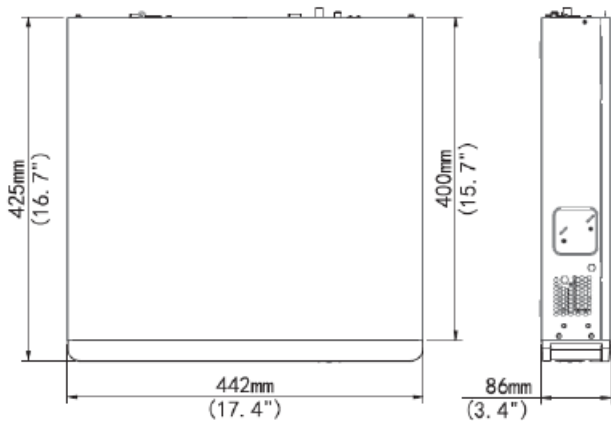

Design and specifications are subject to change without notice.

Specification:

Model	UN-NVR308-16E	UN-NVR308-32E	UN-NVR308-64E
Video/Audio Input			
IP Video Input	16CH	32CH	64CH
Two-way Audio Input	1CH, RCA		
Network			
Incoming Bandwidth	160Mbps	320Mbps	
Outgoing Bandwidth	320Mbps		
Remote Users	128		
Video/Audio Output			
HDMI/VGA Output	HDMI1/VGA 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz		
	HDMI2: 4K (3840x2160) /60Hz, 4K (3840x2160) /30Hz, 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz		
CVBS Output	1CH, BNC		
Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF		
Audio Output	1CH, RCA		
Synchronous Playback	16CH		
Decoding			
Compression	H.265/H.264		
Live view/ Playback	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF		
Capability	3 x 12MP@25, 4 x 4K@30, 8 x 4MP@30, 16 x 1080P@30, 32 x 960P@25, 36 x 720P@30, 64 x D1		
Hard Disk			
SATA	8 SATA interfaces		
Capacity	up to 8TB for each HDDs		
eSATA	1 eSATA interface		
Disk Array			
Array Type	RAID 0, 1, 5, 6, 10		
External Interface			
Network Interface	2 RJ-45 10M/100M/1000M self-adaptive Ethernet Interfaces		
Serial Interface	1 x RS232, 1 x RS485		
USB Interface	Front panel: 2 x USB2.0, Rear panel: 1 x USB3.0		
Alarm In	16CH		
Alarm Out	4CH		
Special Features			
Video Analysis Functions	Support face detection, intrusion detection, cross line detection, people counting, scene change detection, defocus Detection, audio Detection, auto tracking		
Trigger action	When VCA alarm happened, can set the trigger action as send email, upload to FTP and so on.		
Smart Search	Instruction, Face detection, Line crossing, etc.		
Corridor Mode	Display and playback		
Smart updates	Cloud update. IP cameras updates can be done through local NVRs		
General			
Power Supply	100 ~ 240 VAC		
Consumption	≤ 20 W (without HDD)		
Working Temperature	-10°C ~ +55°C (+14°F ~ +131°F)		
Working Humidity	10% ~ 90%		
Dimensions	86mm x 442mm x 425mm (3.4" x 17.4" x 16.7")		
Weight	≤ 5.13 Kg (11.31 lb with HDD)		

www.EasternCCTV.com

Headquarters

50 Commercial St.,
Plainview, NY 11803

TEL: 516-870-3779 FAX: 516-390-1200

Queens, NY

129-04 14th Ave.,
College Point, NY 11356

TEL: 718-939-2710 FAX: 718-939-2713

E. Los Angeles, CA

110 California Ave.,
City of Industry, CA 91744

TEL: 626-961-8810 FAX: 626-961-8809

N. Hollywood, CA

13761 Saticoy St.
Panorama City, CA 91402

TEL: 818-924-9021 FAX: 818-849-5127

Miami, FL

4515 NW 72nd Ave.
Miami, FL 33166

TEL: 305-423-1329 FAX: 786-717-7282

Houston, TX

3790 Westchase Dr.,
Houston, TX 77042

TEL: 832-308-5282 FAX: 832-925-7454