CMIP2932

3 MP WDR Network Box Camera

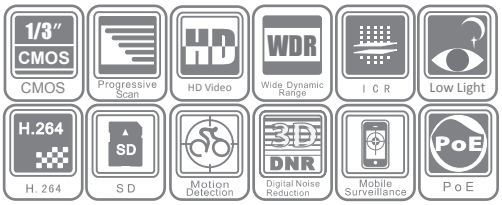

Key features

- Up to 3 megapixel (2048 x 1536) high resolution
- Super low-light
- 120 dB wide dynamic range
- True day / night
- 3D digital noise reduction

Dimensions

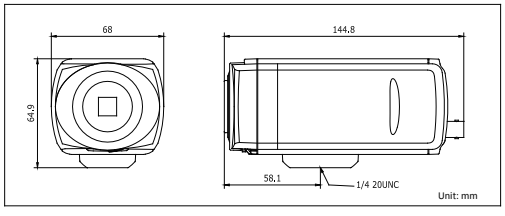

	CMIP2932
Camera	
Image sensor	1/3″ sensor
Min. illumination	Color: 0.1 lux@F1.2, AGC ON B/W: 0.01 lux@F1.2, AGC ON
Shutter time	1/30 (1/25)s ~ 1/100,000s
Lens mount	C/CS mount
Auto iris	DC drive
Day & night	IR cut filter with auto switch
Wide dynamic range	120 dB
Digital noise reduction	3D DNR
Compression standard	
Video compression	H.264 / MPEG4 / MJPEG
Bit rate	32 Kbps ~ 16 Mbps
Audio compression	G.711 / G.726
Dual stream	Yes
Image	
Max. image resolution	2048 x 1536
Frame rate	60 Hz: 15 fps (2048 × 1536), 30 fps (1920 x 1080), 30 fps (1280 x 720) 50 Hz: 12.5 fps (2048 × 1536), 25 fps (1920 x 1080), 25 fps (1280 x 720)
Image settings	Saturation, brightness, contrast adjustable through client software or web browser
Network	
Network storage	NAS (iSCSI optional)
Alarm trigger	Motion detection, tampering alarm, network disconnect , IP address conflict, storage exception
Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, SNMP, HTTPS, FTP, 802.1x, Qos (SIP, SRTP, IPv6 optional)
Security	User authentication, watermark, password protection, heartbeat
System compatibility	ONVIF, PSIA, CGI
Interface	
Audio input	1-ch 3.5 mm audio interface, MIC IN/LINE IN
Audio output	1-ch 3.5 mm audio interface (line level, 600 Ω)
Communication interface	1 RJ45 10M / 100M ethernet interface, 1 RS-485 interface
Alarm input	1
Alarm output	1
Video output	1 Vp-p composite output (75 Ω / BNC)
On-board storage	Built-in SD/SDHC slot, up to 32 GB
Reset button	Yes
General	
Operating conditions	14° F ~ 140° F(-10° C ~ 60° C) Humidity 90% or less (non-condensing)
Power supply	12 VDC ± 10%, PoE (802.3af)
Power consumption	Max. 5.5W(Max. 8.5W with IR cut filter on)
Dimensions	2.7″ × 2.2″ × 5.7″ (68.0 × 64.9 × 144.8 mm)
Weight	1.1 lbs(500g)