FULL HD OVER COAX USE YOUR EXISTING COAX CABLE

HDSDI

HD-SDI FULL HD (1080p)
IR BULLET CAMERA

2.8~12mm 3Mega-Pixel Lens

True Day & Night (ICR)

DC 12V / Smart IR

42 IR LED

XIR 1402-B Grey

1080P OUTDOOR INFRARED BULLET CAMERA WITH ICR

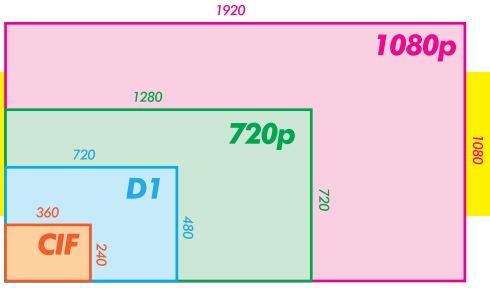

2 MEGA PIXEL *Up To 1080p*

x22 ***MORE COVERAGE than Conventional CCTV Camera***

DUAL OUTPUT
HD-SDI/Analog

3DDNR

DAY & NIGHT FUNCTION

This camera has a function that automatically selects the mode that is appropriate for daytime or night-time conditions. The COLOR mode operates in daytime conditions to provide optimum colors, and BW mode operates in nighttime conditions to enhance the difinition of the image.

PRIVACY FUNCTION

The PRIVACY function enables you to select and record only choose area among twenty-eight areas.

ADDITIONAL FUNCTION

White Balance, Motion Detection, Mirror, Sharpness, Freeze, and Digital Zoom are also available.

CONTROLLED OSD MENU

The camera can be controlled by selecting text displayed on the monitor screen.

XIR 1402V	
Solution	1/2.8" Mega Pixel Sensor
Signal System	PAL/NTSC
Sync. System	Internal Sync.
Effective Pixels	2.0 Mega Pixels
Sensing Area	5.42mm × 3.41mm
Horizontal Resolution	PAL : 1920×1080P 25F/S NTSC : 1920×1080P 30F/S
Video Output	1.0Vp~p75Ω
S/N Ratio	More than 50dB (AGC OFF)
White Balance	Auto Tracking white Balance
Shutter Speed	1/25-1/50000
Infrared Lamps	Night/Day ON/OFF
Minimum Illumination	0 Lux(Infrared Lamps Turn on)
Infrared Wavelength	850nm
IR LEDs	42
Built-in Lens	2.8~12mm 3Mega-pixel Lens
Working Temperature	-10°C~50°C
Storage Temperature	-20°C~60°C
Power Requirement	DC12V, Max Power Consumption Less Than 5W (when the infrared lamps turn on)

Specifications may change without a prior notice. All the images on the page are for illustrative purpose only. They may not representing actual products. All the rights for the registered trademarks are reserved for their respectable owners. Not responsible for any typographical errors.