


Varifocal Lens Camera for Indoor Performance

CMD707W/CMD707, CMD707HW/CMD707H Turret Camera

Features

- 480/540 TVL
- SONY 1/3" Super HAD/Super HAD II CCD
- SONY Effio-E DSP
- 2.8 ~ 12mm varifocal lens
- 35 pcs IR LEDs
- Advanced 2D digital noise reduction (2D DNR)
- Auto Tone Reproduction function (ATR)
- Indoor application
- Plastic housing
- DC 12V input

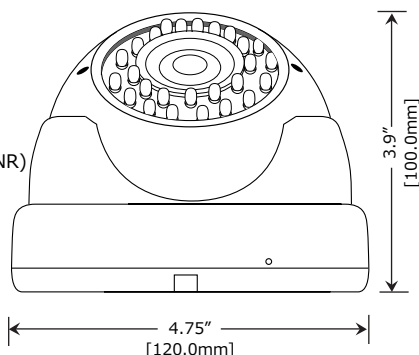

Specifications

Model	CMD707W/CMD707	CMD707HW/CMD707H	
Image	Image Sensor	SONY 1/3" Super HAD CCD	SONY 1/3" Super HAD II CCD
	Effective Pixels	NTSC: 510 (H) X 492 (V)	NTSC: 510 (H) X 492 (V)
	Horizontal Resolution	480 TVL	540 TVL
Lens	Focal Length	2.8 ~ 12mm varifocal lens	2.8 ~ 12mm varifocal lens
	Iris	AES	AES
	Focus	Manual	Manual
	Zoom	Manual	Manual
	ICR	-	-
Electrical	Video System	NTSC	NTSC
	Video Scanning Type	2:1 Interlace	2:1 Interlace
	Sync. System	Internal	Internal
	S/N Ratio	> 50dB (AGC off)	> 50dB (AGC off)
	Min. Illumination	> 0.3 Lux@F1.2 (Color) 0 Lux/F1.2 (IR On)	> 0.3 Lux@F1.2 (Color) 0 Lux/F1.2 (IR On)
	Video Output	1 BNC, 1.0 Vp-p, 75 Ohm Comp.	1 BNC, 1.0 Vp-p, 75 Ohm Comp.
Function	Electronic Shutter	NTSC: 1/60 ~ 1/100,000	NTSC: 1/60 ~ 1/100,000
	White Balance	ATW	ATW
	BLC	BLC	BLC
	Gain Control	Auto	Auto
	OSD	-	-
	Wide Dynamic Range	-	-
	Star Light Sensing	-	-
	DNR	-	-
	Mirror	-	-
Infrared LED	Infrared Red Lamps	35 pcs IR LEDs	35 pcs IR LEDs
	Effective IR Lighting Distance	100ft (30m)	100ft (30m)
Power	Input Voltage	DC 12V	DC 12V
	Power Consumption	<2W (LED OFF) / <6W (LED ON)	<2W (LED OFF) / <6W (LED ON)
Environment	Weather Protection	Weather-resistant	Weather-resistant
	Vandal Protection	Vandal-resistant	Vandal-resistant
	Operating Temperature	14°F ~ 122 °F (-10°C ~ 50 °C)	14°F ~ 122 °F (-10°C ~ 50 °C)
	Storage Temperature	4°F ~ 144 °F (-20°C ~ 60 °C)	4°F ~ 144 °F (-20°C ~ 60 °C)
	Humidity	RH90% Max. (Non-condensing)	RH90% Max. (Non-condensing)
Mechanical	Chasis Material & Color	Plastic & White (CMD707W) Black (CMD707)	Plastic & White (CMD707HW) Black (CMD707H)
	Product Net Weight	0.62lbs (280 g)	0.62lbs (280 g)
	Product Dimension	120mm x 100mm	120mm x 100mm